

APP CRS
234°

Rwy Idg
TDZE
Apt Elev
7500
435
435


RNAV (RNP) Z RWY 23L
RALEIGH-DURHAM INTL (RDU)

RNP AR APCH-GPS.
▼ For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Simultaneous approach authorized, except for arrivals at KENCH. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct ZEBUL and hold.

D-ATIS 123.8	RALEIGH APP CON 127.675 307.9	RALEIGH TOWER 127.45 257.8	GND CON 121.9 348.6	CLNC DEL 120.1	CPDLC
------------------------	---	--------------------------------------	-------------------------------	--------------------------	-------

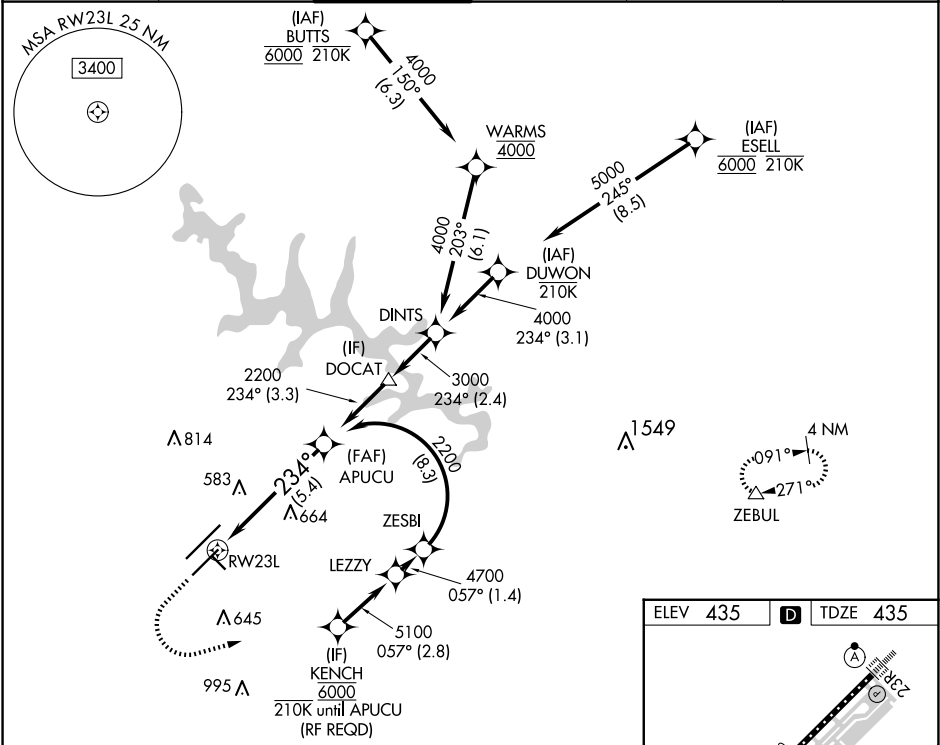

1100

2600

ZEBUL

See planview for multiple IF locations.

CATEGORY

A

B

C

D

RNP 0.10 DA

776/30 341 (400-%)

RNP 0.30 DA

826/35 391 (400-%)

AUTHORIZATION REQUIRED

ELEV 435

D

TDZE 435

REIL Rwy 32

MIRL Rwy 14-32

HIRL Rws 5R-23L and 5L-23R

TDZ/CL Rws 5L, 23L, and 23R