

WAAS CH 81809 W22A	APP CRS 223°	Rwy Idg 8001 TDZE 598 Apt Elev 598
--	------------------------	---

RNAV (GPS) RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)


RNP APCH - GPS

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Lincoln altimeter setting; increase LPV DA to 942 feet and all visibilities ½ SM, LNAV/VNAV DA to 1108 feet and all visibilities ½ SM; increase all MDA's 60 feet and visibility LNAV and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV Cat Cts visibility to ½ SM. For inop ALS when using Lincoln altimeter setting, increase LPV Cat Cts visibility to 1 SM, increase LNAV/VNAV all Cts visibility to 1 ½ SM.

MALSR

MISSED APPROACH:
Climb to 2700 direct
COVAC and hold.

ATIS	SAINT LOUIS APP CON *	SPRINGFIELD TOWER *	GND CON	CLNC DEL	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	121.7	122.95

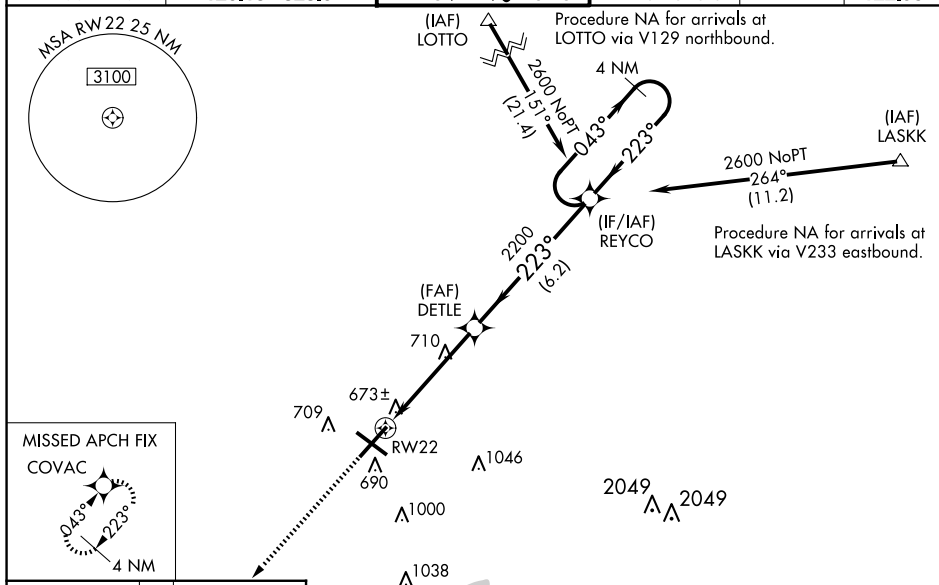

ELEV 598	D	TDZE 598
----------	----------	----------

