

WAAS CH 69216 W30A	APP CRS 300°	Rwy Idg TDZE 12 Apt Elev 15	6751
--	------------------------	---	-------------

RNAV (GPS) RWY 30

JACK BROOKS RGNL (BPT')


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Rwy 30 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Orange County altimeter setting. When local altimeter setting not received, use Orange County altimeter setting: increase LPV DA to 294 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 355 feet and all visibilities ½ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D/E ¼ SM.

MISSED APPROACH:
Climb to 3100 direct GIDDY and hold, continue climb-in-hold to 3100.

ATIS 126.3	HOUSTON APP CON 121.3 377.1	BEAUMONT TOWER * 119.5 (CTAF) 0	GND CON 124.85	CLNC DEL 118.3	UNICOM 122.95
----------------------	---------------------------------------	--	--------------------------	--------------------------	-------------------------

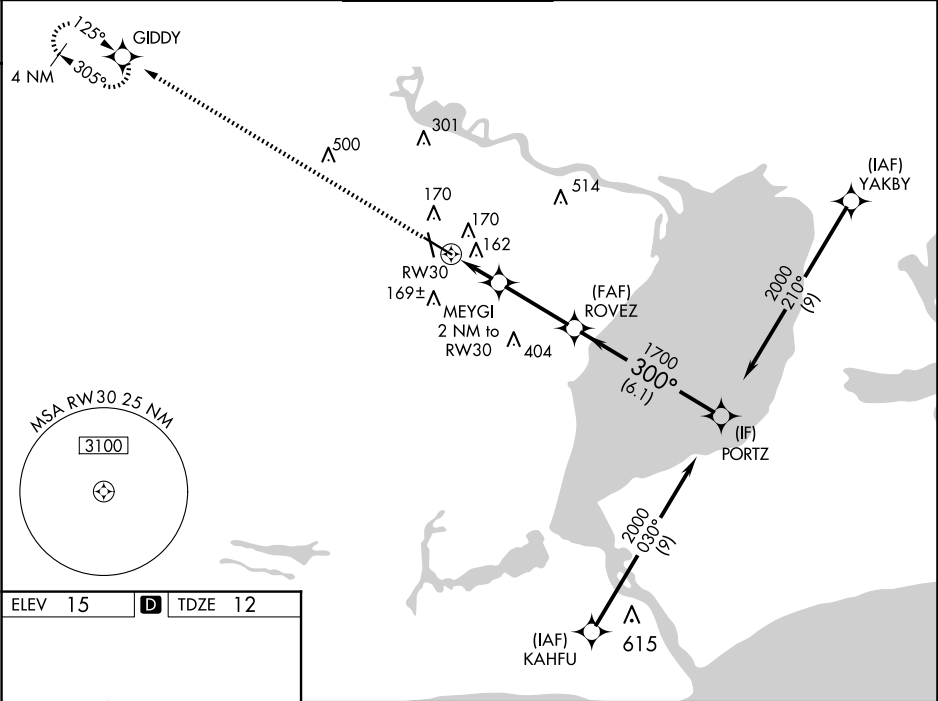

ELEV 15 **D** TDZE 12

REIL Rws 16, 30 and 34 **0**
HIRL Rws 12-30, 16-34 **0**

3100 GIDDY

CATEGORY	A	B	C	D	E
LPV DA	262-¾		250 (300-¾)		
LNAV/VNAV DA	323-7/8		311 (400-7/8)		
LNAV MDA	420-1	408 (500-1)	420-1½		408 (500-1½)

GP 3.00°
TCH 54