


LOC I-JLN	APP CRS	Rwy Idg
110.3	134°	5813
		TDZE
		970
		Apt Elev
		978

ILS or LOC RWY 13

JOPLIN RGNL (JLN)

ADF required for LOC only. RADAR required.		MALSF 	MISSED APPROACH: Climb to 3100 on I-JLN LOC localizer course southeast to HOVIL/RADAR and hold.
	Autopilot coupled approach NA below 1147. Inop table does not apply to S-ILS 13 all Cats. MALSF (NSTD) 1368'.		

ATIS	KANSAS CITY CENTER	JOPLIN TOWER*	GND CON	UNICOM
120.85	128.6 282.325	119.8 (CTAF) 0	121.6	122.95

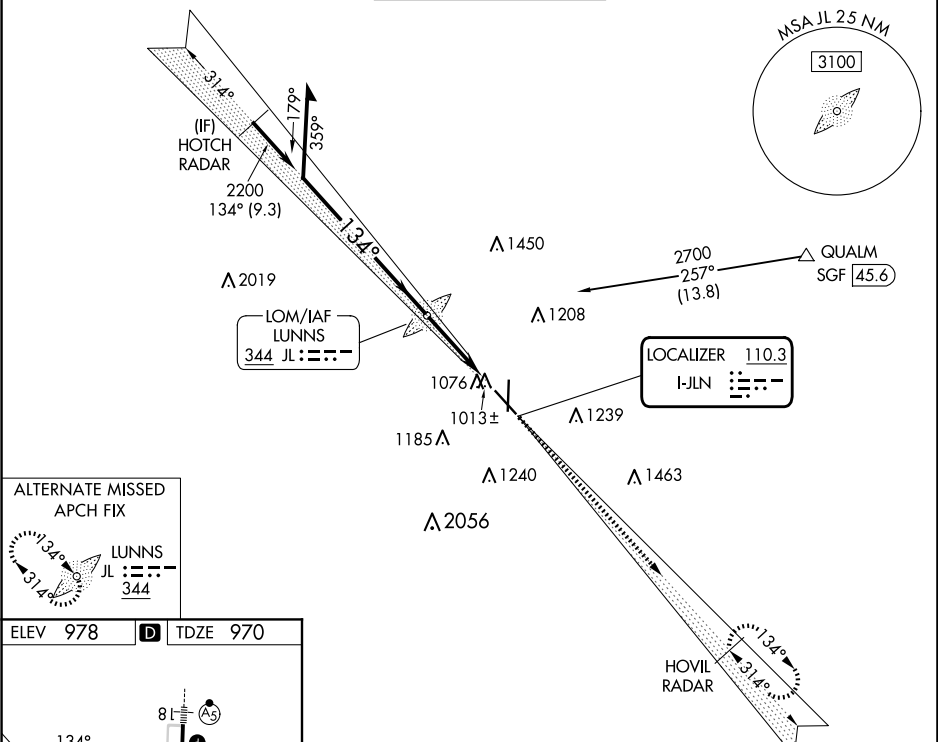

ELEV	978	D	TDZE	970
HIRL Rwy 13-31 0				
HIRL Rwy 18-36				
FAF to MAP 3.7 NM				
Knots	60	90	120	150
Min:Sec	3:42	2:28	1:51	1:29

Remain within 10 NM		JL LOM LUNNS	6000	3100	HOVIL RADAR
2700		314°	2178	I-JLN SE crs	
GS 3.00°		134°	2200		
TCH 40					
			3.7 NM		
CATEGORY	A	B	C	D	
S-ILS 13	1170/40 200 (200-¾)				
S-LOC 13	1300/40 330 (400-¾)				
CIRCLING	1460-1 482 (500-1)	1500-1 522 (600-1)	1540-1½ 562 (600-1½)	1580-2 602 (700-2)	