

WAAS CH 40002 W21A	APP CRS 208°	Rwy Idg TDZE Apt Elev	7619 4977 5045
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21L

PRESCOTT RGNL/ERNEST A LOVE FLD (PRC)

RNP APCH - GPS.

▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 47°C. For inoperative ALS, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cat C/D visibility to 1¾ SM. Circling Rwy 3L, 12, 30 NA at night.
Missed approach requires a minimum climb of 345 feet per NM to 7300.


MALSR

AS

|||

MISSED APPROACH: Climb to 5500 then climbing right turn to 9100 direct DILLY and hold, continue climb-in-hold to 9100.

ATIS 127.2	PHOENIX APP CON 133.575 281.55	PRESCOTT TOWER ★ 125.3 (CTAF) 1 257.9	GND CON 121.7	CLNC DEL 119.25	128.75 1	UNICOM 122.95
----------------------	--	--	-------------------------	---------------------------	-----------------	-------------------------

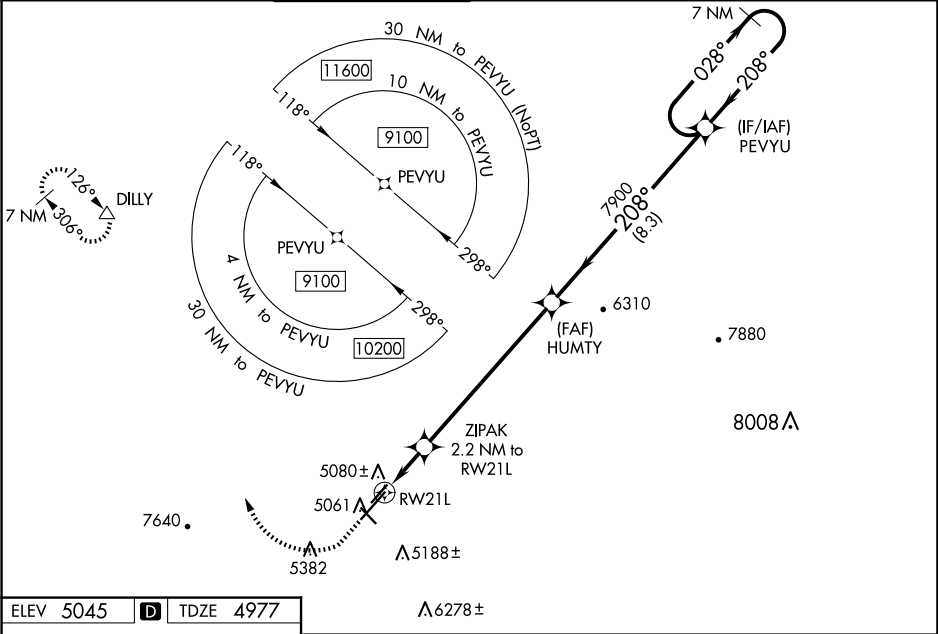

5500

↑

9100

↗

DILLY

△

*LNAV only.

ZIPAK 2.2 NM to RW21L

HUMTY 7900

PEVYU 7 NM Holding Pattern

9100

GP 3.00° TCH 55

208°

028°

1.5

0.7

6.9 NM

8.3 NM

CATEGORY

A

B

C

D

LPV DA

5177-½ 200 (200-½)

LPV DA

5277-½ 300 (300-½)

LNAV/VNAV DA

5391-¾ 414 (400-¾)

LNAV MDA

5480-½ 503 (500-½)

5480-1 503 (500-1)

CIRCLING

5520-1 475 (500-1)

5760-1 715 (800-1)

6080-3 1035 (1100-3)

6680-3 1635 (1700-3)