


ILS or LOC RWY 17L
ORLANDO INTL (MCO)

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on heading 100° and ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000.

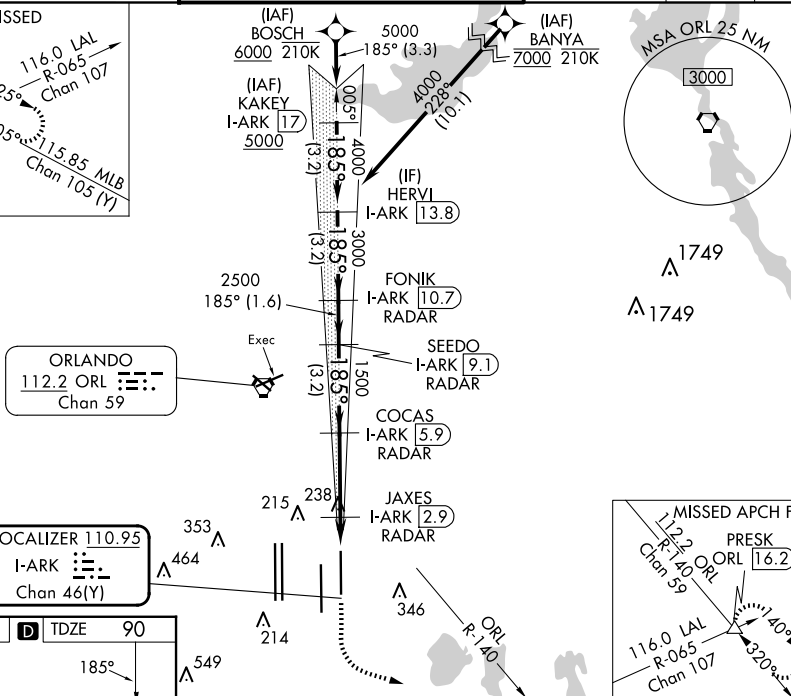

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

3D RNAV (RNP) APPROACH CHART

3D Diagram: Shows the vertical profile of the approach. Altitudes: 6000, 5000, 4000, 3000, 2500, 1500, 540. Distances: 3.3, 3.2 NM, 1.6 NM, 3.2 NM, 3 NM, 1.3 NM. GS 3.00°, TCH 55.

2D Plan View: Shows the horizontal profile of the approach. Altitudes: 6000, 5000, 4000, 3000, 2500, 1500, 540. Distances: 3.3, 3.2 NM, 1.6 NM, 3.2 NM, 3 NM, 1.3 NM.

3D Perspective View: Shows the 3D path of the approach. Altitudes: 6000, 5000, 4000, 3000, 2500, 1500, 540. Distances: 3.3, 3.2 NM, 1.6 NM, 3.2 NM, 3 NM, 1.3 NM.

Legend:

- BOSCH** (Waypoint)
- KAKEY I-ARK 17** (Waypoint)
- HERVI I-ARK 13.8** (Waypoint)
- FONIK I-ARK 10.7** (Waypoint)
- SEEDO I-ARK 9.1** (Waypoint)
- COCAS I-ARK 5.9** (Waypoint)
- JAXES I-ARK 2.9** (Waypoint)
- I-ARK 1.7** (Waypoint)

Notes:

- VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).
- ORL R-140
- PRESK

CATEGORY	A	B	C	D
S-ILS 17L	290/18	200 (200-½)		
S-LOC 17L	500/24	410 (500-½)	500/40	410 (500-¾)
C CIRCLING	740-1	644 (700-1)	740-1¼ 644 (700-1¾)	740-2 644 (700-2)