
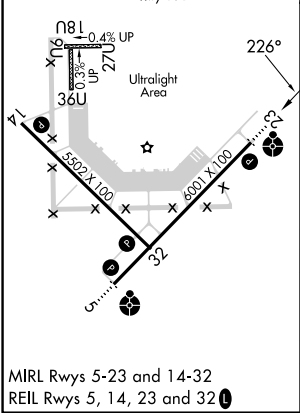


WAAS CH 48903 W23A	APP CRS 226°	Rwy Idg TDZE 578 Apt Elev 583	6001
--	------------------------	---	-------------

RNAV (GPS) RWY 23

FREEMAN MUNI (SE.R)

RNP APCH - GPS.		ODALS	MISSED APPROACH: Climb to 2500 direct JIRIP and hold.
▼ ▲ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS, increase LNAV/VNAV Cats C/D visibility to 1 3/8 SM.		☉	
AWOS-3 119.425	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0	

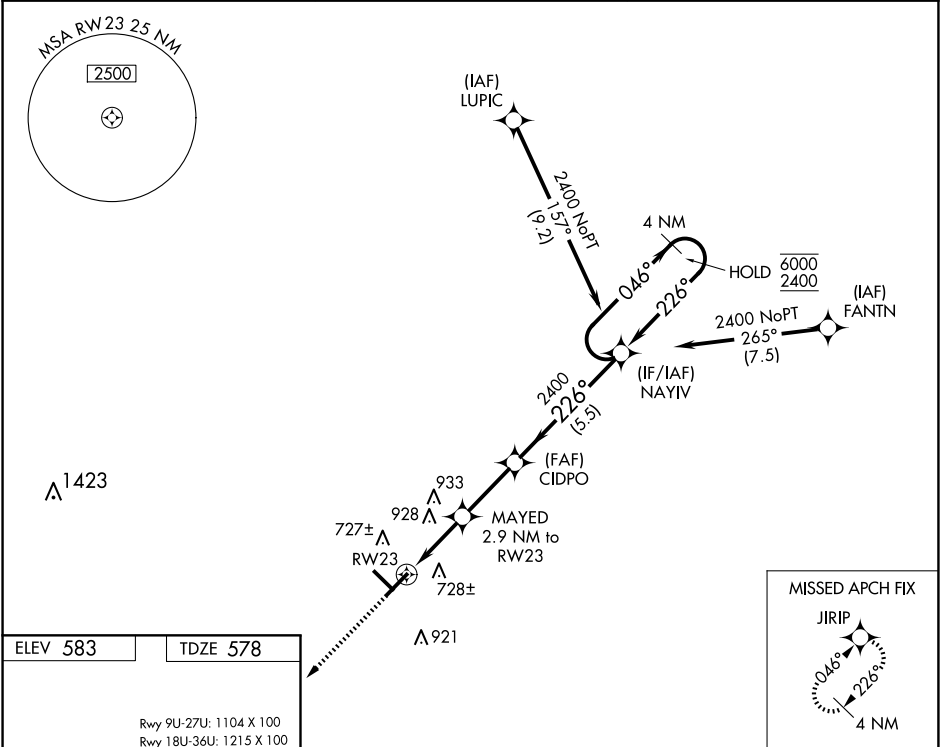

2500 JIRIP		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 33°).		4 NM Holding Pattern	
RWY 23		MAYED 2.9 NM to RWY 23		CIDPO 2400	
1.7 NM to RWY 23		1.2 NM		2.7 NM	
1.7 NM		1.2 NM		2.7 NM	
CATEGORY		A		B	
LPV DA		855-1		277 (300-1)	
LNAV/VNAV DA		1020-1 1/8		442 (500-1 1/8)	
LNAV MDA		1160-1 582 (600-1)		1160-1 1/2 582 (600-1 1/2)	
CIRCLING		1160-1 577 (600-1)		1240-1 3/4 657 (700-1 3/4)	
				1240-2 657 (700-2)	

EC-2, 17 APR 2025 to 15 MAY 2025

EC-2, 17 APR 2025 to 15 MAY 2025