
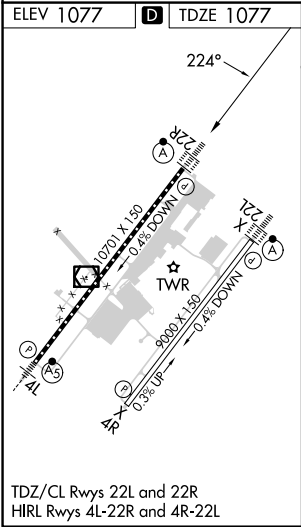



WAAS CH 40214 W22A	APP CRS 224°	Rwy Idg 10701 TDZE 1077 Apt Elev 1077
--	------------------------	--

RNAV (GPS) RWY 22R

WILMINGTON AIR PARK (ILN)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.			ALSF-2 ⓐ	MISSED APPROACH: Climb to 1500 then right turn 3000 direct TIGRR and hold.	
D-ATIS 124.925	COLUMBUS APP CON 118.85 269.275	WILMINGTON TOWER 119.475	GND CON 121.6	CLNC DEL 128.85	

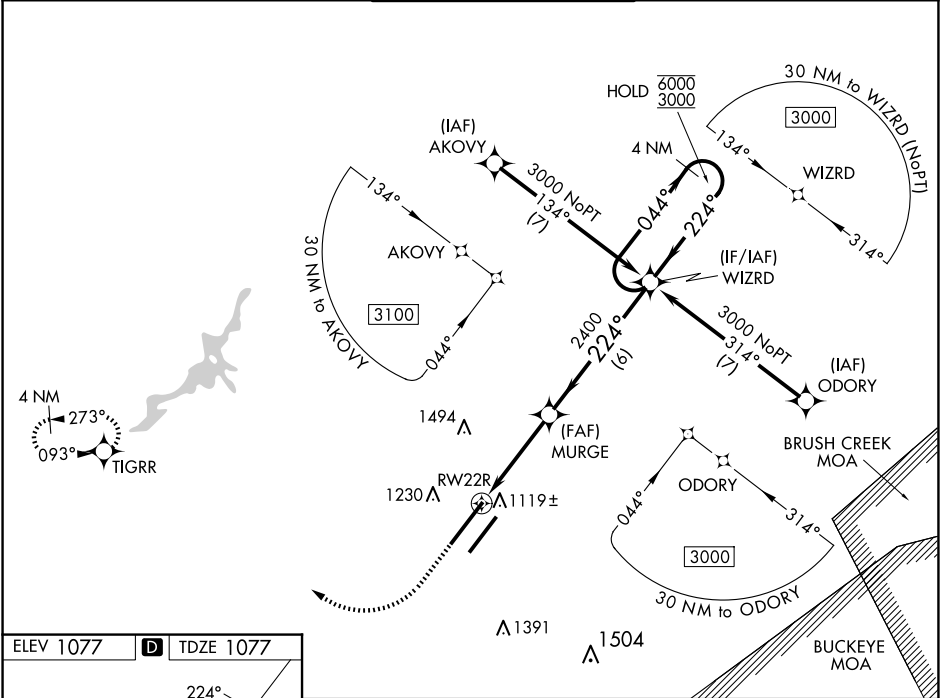

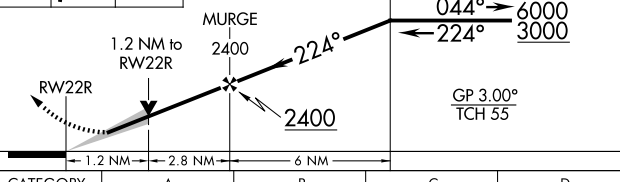1500	3000	TIGRR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				4 NM Holding Pattern
							
CATEGORY			A	B	C	D	
LPV	DA	1277/18 200 (200-½)					
LNAV/ VNAV	DA	1393/24 316 (400-½)					
LNAV MDA		1520/24	443 (500-½)	1520/45 443 (500-¾)			
 CIRCLING		1560-1	483 (500-1)	1860-2¼ 783 (800-2¼)		1860-2½ 783 (800-2½)	