

WAAS
CH **72818**
W35A

APP CRS
354°

Rwy Idg
TDZE
Apt Elev
5593
1067
1073

RNAV (GPS) RWY 35
SHAWNEE RGNL (SNL)



▼

▲

Baro-VNAV NA when using Seminole altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1357 feet; increase LNAV/VNAV DA to 1605 feet and visibility ¼ SM; increase all MDAs 40 feet and visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
FAVAN and hold.

AWOS-3 118.275	OKE CITY APP CON 120.45 288.325	UNICOM 122.7 (CTAF)
--------------------------	---	-------------------------------

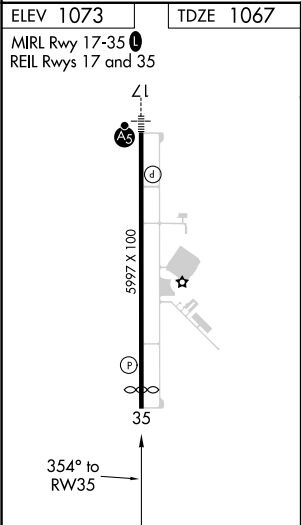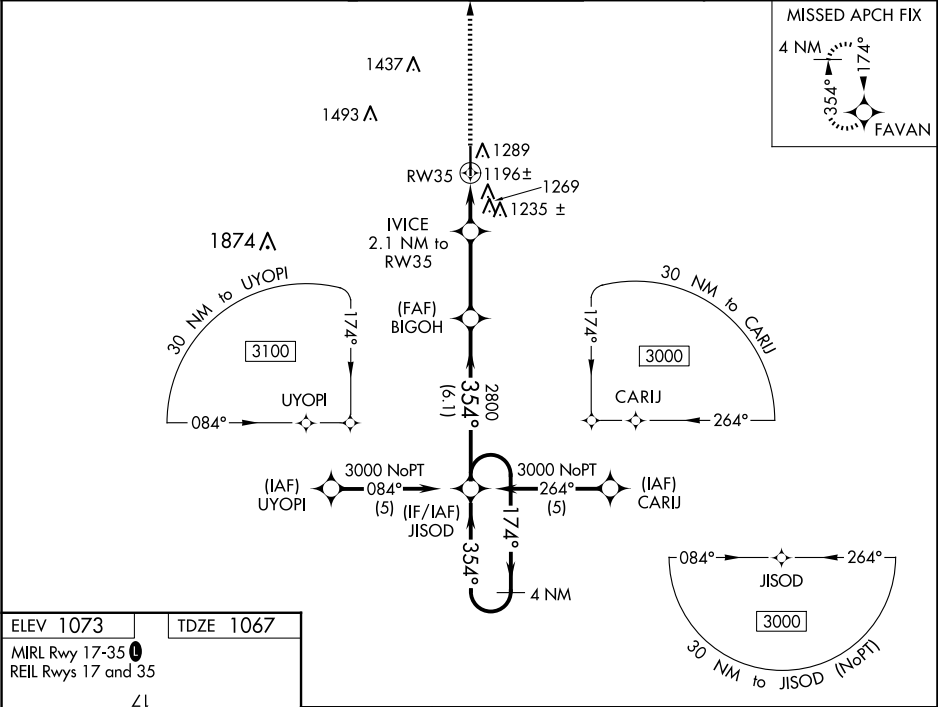

3000

FAVAN

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 42).

*LNAV only.