


LOC I-BAK 110.7	APP CRS 228°	Rwy ldg TDZE Apt Elev	6401 656 656
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 23



COLUMBUS MUNI (BAK)

ADF or RADAR required.		MALSRR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct CLIFTS LOM and hold, continue climb-in hold to 2300.	
NA For inop ALS increase S-LOC 23 Cats C/D visibility to 1 1/2 SM.				

AWOS-3 119.75	INDIANAPOLIS APP CON 134.85 317.8	COLUMBUS TOWER ★ 118.6 (CTAF) 0	GND CON 121.6	CLNC DEL 134.85 (When twr closed)	UNICOM 122.95
-------------------------	---	---	-------------------------	--	-------------------------

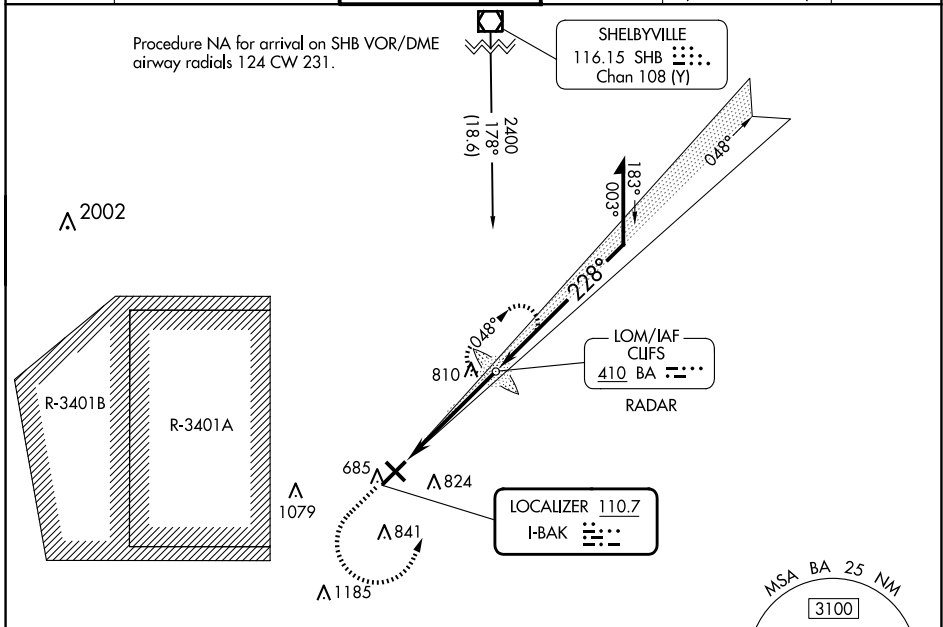

ELEV 656	D	TDZE 656
----------	----------	----------

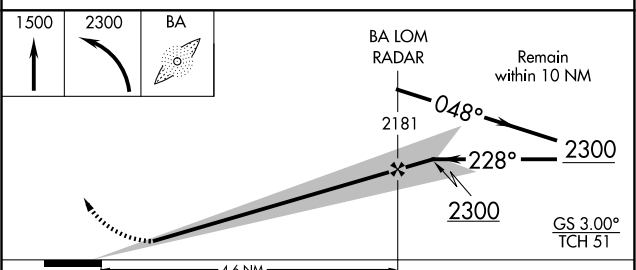

CATEGORY	A	B	C	D
S-ILS 23	856-1/2 200 (200-1/2)			
S-LOC 23	1060-1/2	404 (500-1/2)	1060-3/4	404 (500-3/4)
C CIRCLING	1140-1	484 (500-1)	1200-1/2 544 (600-1/2)	1400-2/2 744 (800-2/2)

FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32