

LOC I-GZX 109.9	APP CRS 129°	Rwy Idg 9604 TDZE 636 Apt Elev 661
---------------------------	------------------------	--

ILS or LOC RWY 13

GENERAL DOWNING - PEORIA INTL (PIA)

ADF required for missed approach.

▼


▲

For inoperative MALSR, increase S-LOC 13 Cat C/D visibility to 1½ mile.
Circling Rwy 13, 31 NA at night.
RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct PI LOM and hold.

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55
----------------------------	---	-------------------------------------	--------------------------------	-----------------------------------

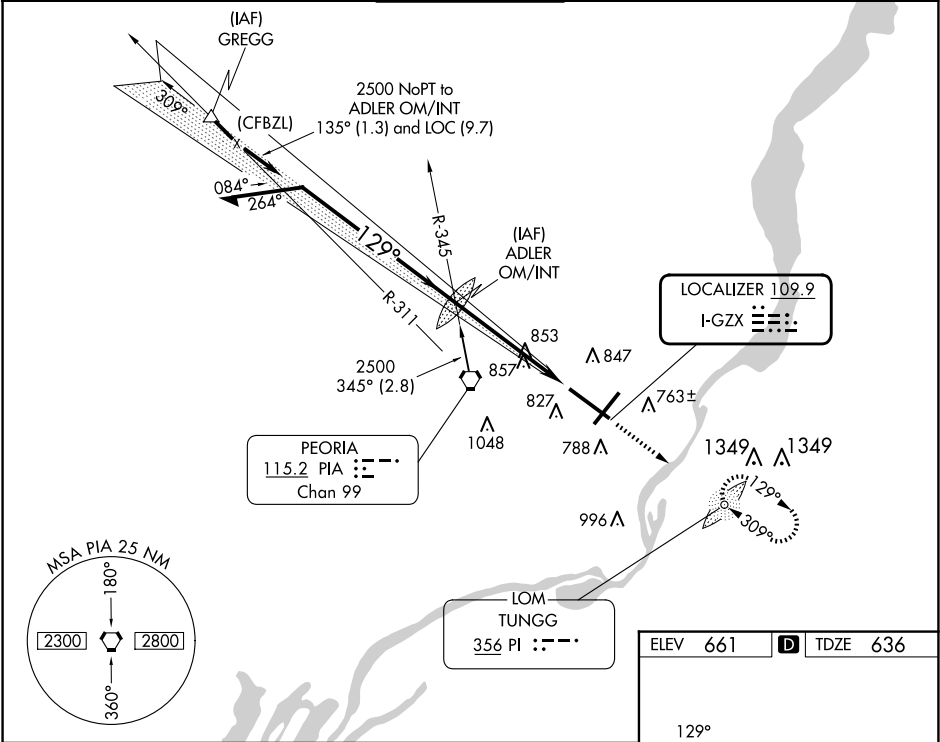

Remain within 10 NM				
ADLER OM/INT				
2500				
309°				
129°				
2500				
GS 3.00° TCH 59				
5.3 NM				
CATEGORY	A	B	C	D
S-ILS 13	*836/24 200 (200-½)			
S-LOC 13	1120/24	484 (500-½)	1120/50	484 (500-1)
CIRCLING	1160-1	499 (500-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

ELEV 661

TDZE 636

129°

TWR 755

10104 X 130

8004 X 130

709

31

10.3°

129°

309°

HIRL Rwys 4-22 and 13-31

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46