

WAAS CH 77509 W31A	APP CRS 309°	Rwy Idg 10104 TDZE 650 Apt Elev 661
--	------------------------	--

RNAV (GPS) RWY 31
GENERAL DOWNING - PEORIA INTL (PIA)

⚠ RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 1028 feet and all visibilities to RVR 3500; increase LNAV/VNAV DA to 1211 feet and all visibilities to 1 ½ SM; increase all MDAs 100 feet and LNAV visibility Cat C/D to 1 ½ SM, and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to RVR 5500, LNAV/VNAV all Cats visibility to 1 ½ SM, and LNAV visibility Cat C/D to 1 ½ SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to RVR 5500, LNAV/VNAV all Cats visibility to 1 ½ SM, and LNAV visibility Cat C/D to 1 ½ SM.

MALSR





MISSED APPROACH:
Climb to 2500 direct
FAPSA and hold.

ATIS	SAINT LOUIS APP CON	PEORIA TOWER	GND CON	CLNC DEL
126.1 282.2	125.8 269.2	124.0 353.85	121.85 348.6	124.675 317.55


MISSED APCH FIX



Procedure NA for arr
VORTAC on V343 no

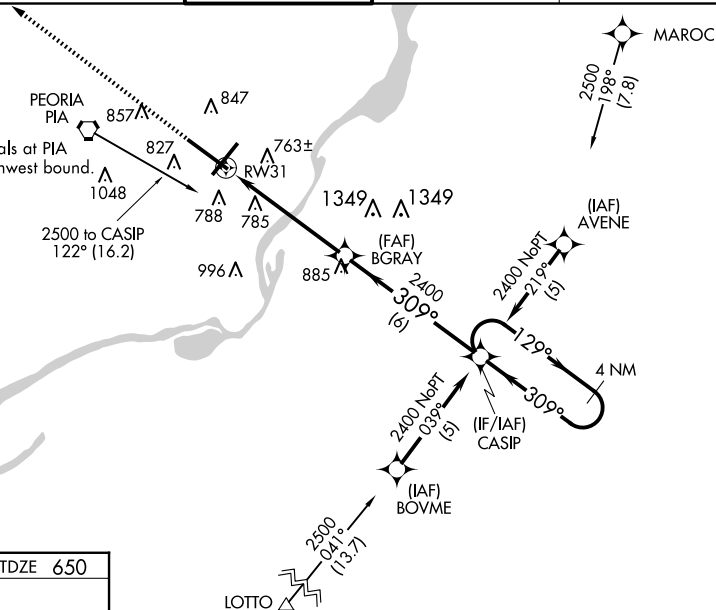

ELEV 661	D	TDZE 650
----------	----------	----------

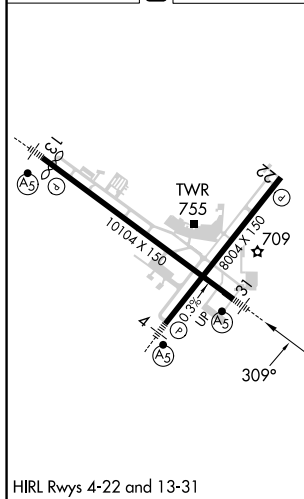

PEORIA, ILLINOIS

Amdt 1F 21MAR24

GENERAL DOWNING - PEORIA INTL (PIA)

40°40'N-89°42'W

RNAV (GPS) RWY 31