

WAAS CH 87116 W20A	APP CRS 205°	Rwy Idg TDZE Apt Elev	5600 568 571
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

DANVILLE RGNL (DAN)

RNP APCH.


▼

⚠

Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cts visibility ¼ mile and LNAV Cts C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.

ASOS 128.125	WASHINGTON CENTER 124.05 352.0	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

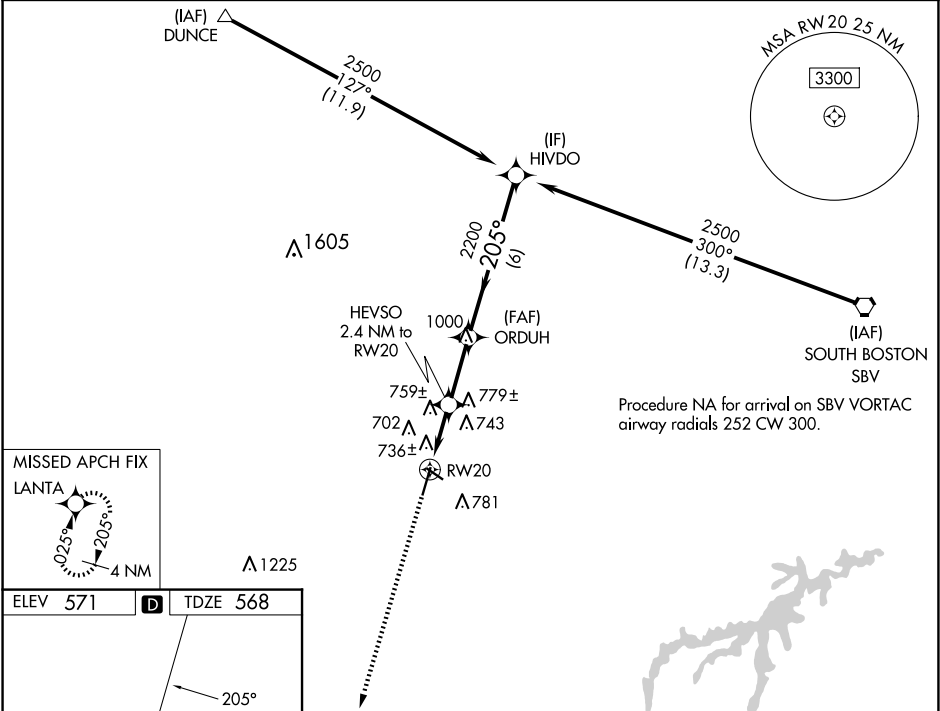

ELEV 571	D	TDZE 568
MISSED APCH FIX LANTA 2500 205° 4 NM		
2500 LANTA *LNAV only. *1.3 NM to RW20 HEVSO 2.4 NM to RW20 ORDUH 2200 HIVDO 2500 1380* 2200 205° Procedure Turn NA GP 3.00° TCH 50		
1.3 NM	1.1 NM	2.5 NM
6 NM		
CATEGORY	A	B
LPV	DA	768-1 200 (200-1)
LNAV/VNAV	DA	1026-1½ 458 (500-1½)
LNAV MDA	1020-1 452 (500-1)	1020-1¼ 452 (500-1¼)
		1020-1½ 452 (500-1½)