ILS or LOC RWY 4L
JOHN F KENNEDY INTL (JFK)

LOC/DME I-HIQ	APP CRS	Rwy ldg	11010
110.9	044°	TDZE	13
Chan 46		Apt Elev	13

RADAR required for procedure entry. DME or RADAR required for LOC only.

T Simultaneous approach authorized.
A Autopilot coupled approach NA below 200 feet MSL.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 on JFK VOR/DME R-062 to DUFFY INT/JFK 14.8 DME and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON		KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125	269.0	Rwys 4R/22L and 13L/31R 119.1	281.55	121.9	135.05	
					Rwys 4L/22R and 13R/31L 123.9	281.55	348.6	348.6	

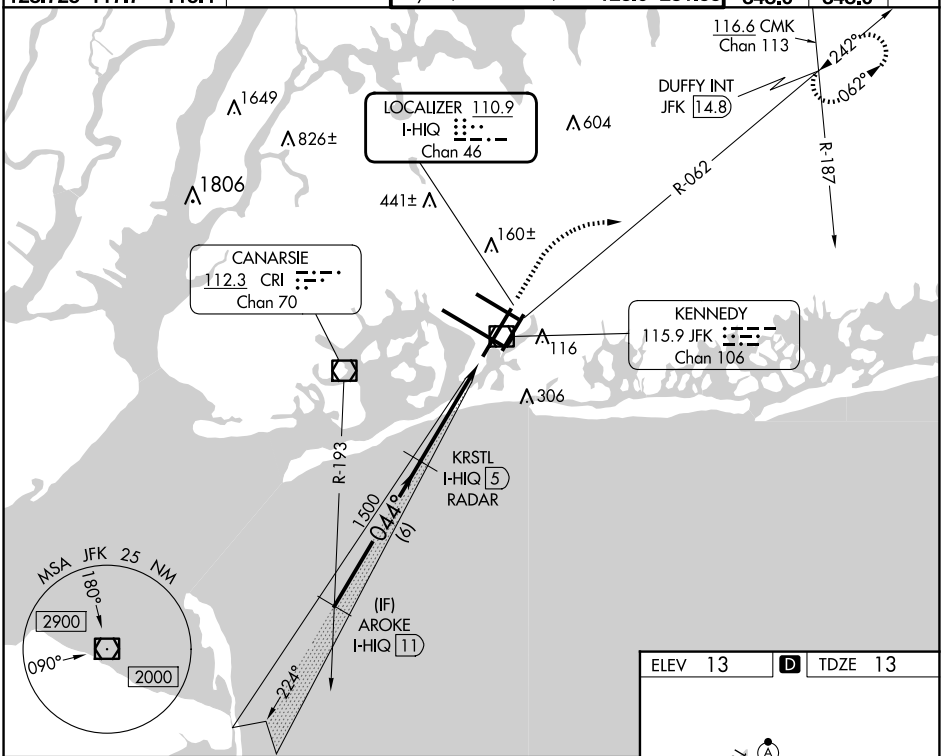

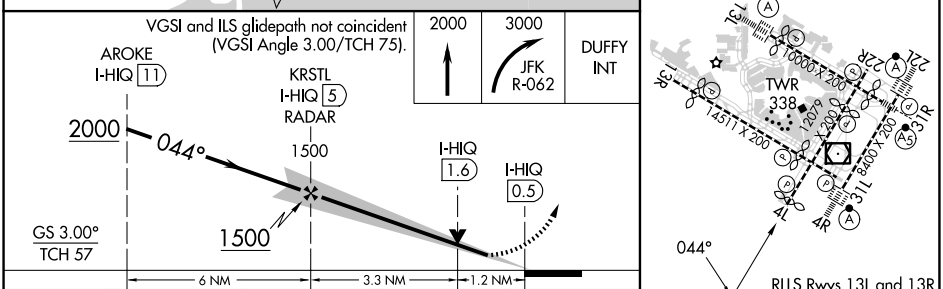

CATEGORY	A	B	C	D
S-ILS 4L	231/40 218 (300-¾)			
S-LOC 4L	460/55 447 (500-1)		460-1⅜ 447 (500-1⅜)	
C CIRCLING	640-1 627 (700-1)		700-2 687 (700-2)	700-2¼ 687 (700-2¼)

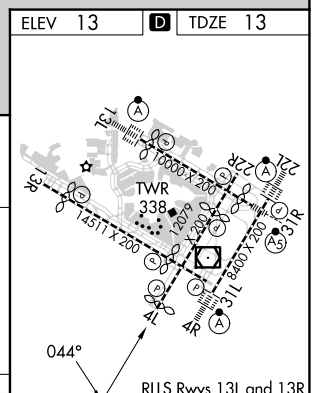

RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-2, 17 APR 2025 to 15 MAY 2025