

APP CRS
314°

Rwy Idg
8486

TDZE
12

Apt Elev
13

RNAV (RNP) Z RWY 31R

JOHN F KENNEDY INTL (JFK)


RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1800 then climbing left turn to 4000 direct COL VOR/DME and hold.

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0	119.1 281.55 123.9 281.55	121.9 348.6	135.05 348.6	

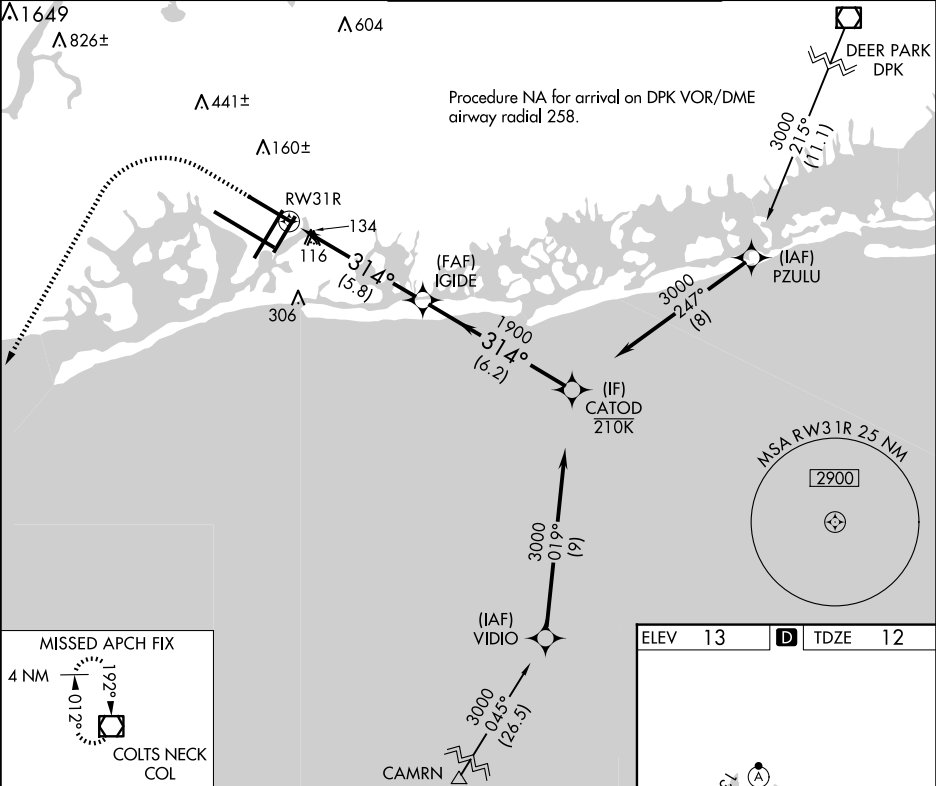

ELEV 13

TDZE 12

TWR 338

14311 X 200

314°

CATEGORY

A

B

C

D

RNP 0.30 DA

458/50

446 (500-1)

AUTHORIZATION REQUIRED

RLS Rwys 13L and 13R

HIRL all Rwys

TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R