


WAAS CH 86705 W14A	APP CRS 139°	Rwy Idg 7540 TDZE 23 Apt Elev 30
--	------------------------	---


RNAV (GPS) RWY 14

SARASOTA/BRADENTON INTL (SRQ)

RNP APCH.			MALSR 	MISSED APPROACH: Climb to 3000 direct GINSE and on track 107° to MURDO and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSR, increase LNAV Cats C and D visibility to 1½ mile.					
ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1(CTAF) 0 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95

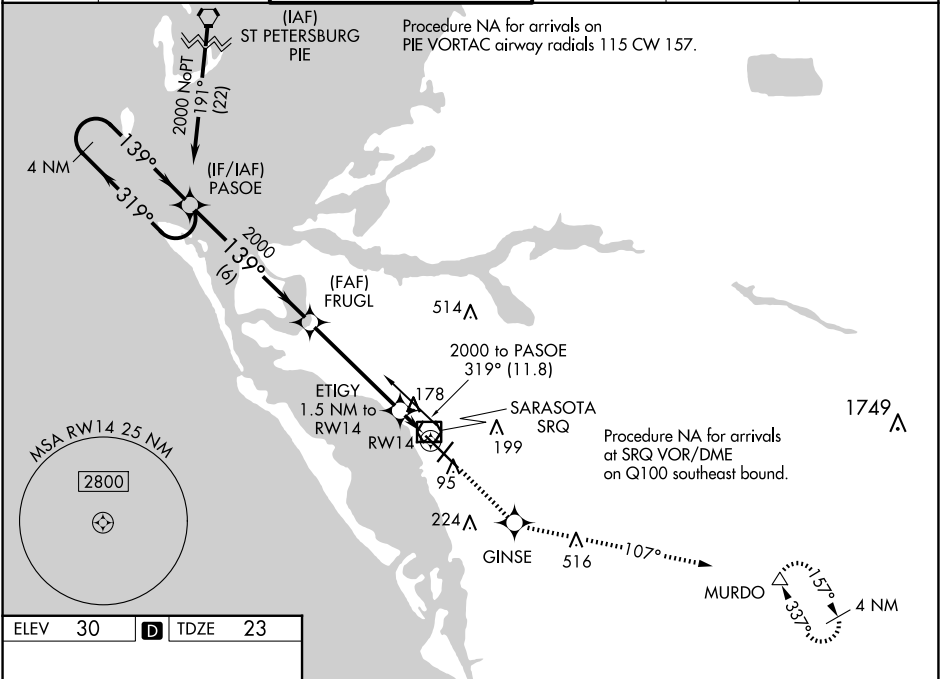

ELEV 30	D	TDZE 23
---------	---	---------

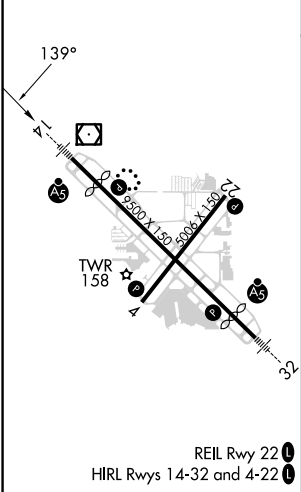

4 NM Holding Pattern PASOE FRUGL 2000 2000 ETIGY 1.5 NM to RW14 *LNAV only. RW14 GP 3.00° TCH 54 3000 GINSE tr 107° MURDO				
← 319° 139° → 139° 6 NM 4.5 NM 1.5 NM *560				
CATEGORY	A	B	C	D
LPV DA	223-½ 200 (200-½)			
LNAV/ VNAV DA	489-1⅛ 466 (500-1⅛)			
LNAV MDA	440-½	417 (500-½)	440-¾	417 (500-¾)
CIRCLING	500-1	470 (500-1)	600-1½ 570 (600-1½)	600-2 570 (600-2)

SE-3, 17 APR 2025 to 15 MAY 2025

SE-3, 17 APR 2025 to 15 MAY 2025