

WAAS CH <b>65638</b> <b>W23A</b>	APP CRS <b>235°</b>	Rwy Idg TDZE Apt Elev	<b>5000</b> <b>78</b> <b>79</b>
--	------------------------	-----------------------------	---------------------------------------

# RNAV (GPS) RWY 23

NEW BEDFORD RGNL (E/WB)



RNP APCH-GPS.

▼ Baro-VNAV and VDP NA when using Taunton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Taunton altimeter setting and increase LPV DA to 393 feet, increase LNAV/VNAV DA to 412 feet; increase all MDA 40 feet and LNAV Cats C and D and Circling Cat C visibility ¼ SM. For inop MALSRL, increase LPV all Cats visibility ½ mile, LNAV/VNAV and LNAV Cat A/B visibility ¼ mile. For inop MALSRL when using Taunton altimeter setting, increase LNAV/VNAV all Cats visibility ¾ mile, LNAV Cat A/B visibility ¼ mile and Cat C/D visibility ¾ mile.

MALSRL

MISSED APPROACH: Climb to 2100 direct BONNI and hold.

ATIS <b>126.85</b>	PROVIDENCE APP CON* <b>128.7 269.525</b>	NEW BEDFORD TOWER* <b>118.1 (CTAF) 239.0</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-----------------------	---	---	-------------------------	-------------------------

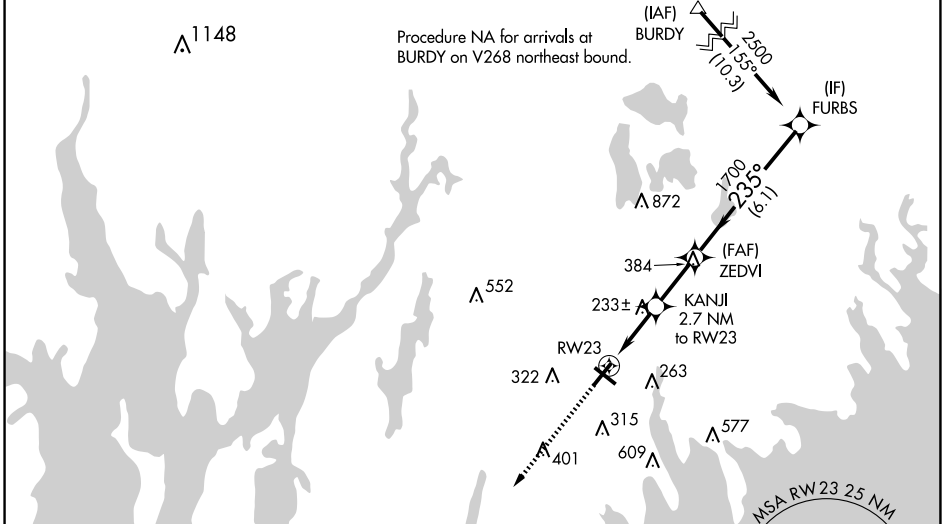

ELEV 79	TDZE 78				
MIRL Rwy 14-32 HIRL Rwy 5-23 REIL Rwy 32		NEW BEDFORD RGNL (E/WB) RNAV (GPS) RWY 23			
NEW BEDFORD, MASSACHUSETTS Amdt 1A 20APR23		NEW BEDFORD RGNL (E/WB) RNAV (GPS) RWY 23			

NE-1, 17 APR 2025 to 15 MAY 2025

NE-1, 17 APR 2025 to 15 MAY 2025