

RNAV (GPS) RWY 3
MID-OHIO VALLEY RGNL (PKB)



▼ Circling Rwy 10, 28 NA at night. Rwy 3 helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 38°C.

▲ When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1302 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1436 feet and visibility all Cats ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1% SM and LNAV Cats A/B visibility to RVR 5500. For inop ALS, when using Athens/Albany altimeter setting, increase LPV all Cats visibility to 1% SM and LNAV/VNAV all Cats visibility to 1¼ SM.

MISSED APPROACH:
Climb to 3000 direct
OWAVE and hold.

UNICOM
122.95

MISSED APCH FIX

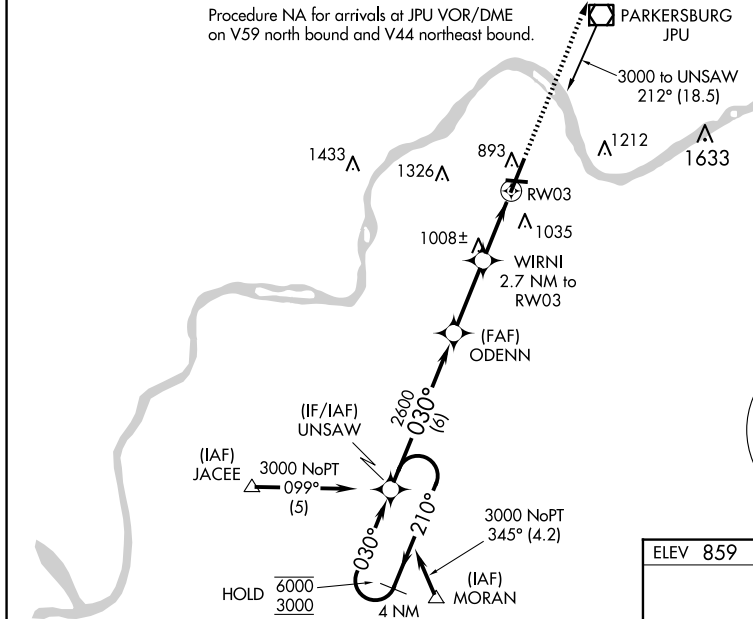

4 NM Holding Pattern

6000 ← 210°

3000 030° →

UNSAW

ODENN

WIRNI 2.7 NM to RW03

GP 3.00°

TCH 48

2600

*1700

*1.3 NM to RW03

RW03

3000

OWAVE

*UNAV only.


6 NM

2.8 NM

1.4 NM

1.3 NM

CATEGORY		A	B	C	D
LPV	DA	1202/40		372 (400-¾)	
LNAV/ VNAV	DA	1336/60		505 (500-1¼)	
LNAV	MDA	1260/40		430 (500-¾)	
CIRCLING		1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)

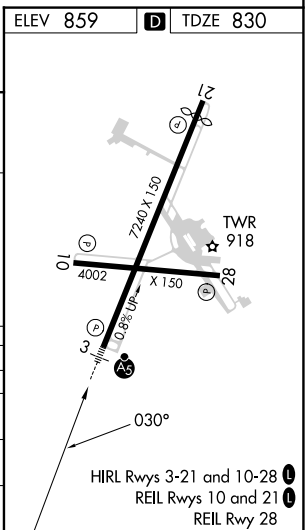MID-OHIO VALLEY RGNL (PKB)
RNAV (GPS) RWY 3

NE-4, 17 APR 2025 to 15 MAY 2025

NE-4, 17 APR 2025 to 15 MAY 2025