



|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 9020 |
| 172°    | TDZE     | 4457 |
|         | Apt Elev | 4457 |

RNAV (GPS) RWY 17

LOGAN-CACHE (LGU)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div><div></div><div></div></div><div><div></div><div></div></div></div></div> <div>DME/DME RNP-0.3 NA. Circling NA east of Rwy 17-35.<br/>Night Landing: Rwy 10-28 NA.<br/>Inop table does not apply to LNAV Cats C/D.<br/>*Missed approach requires minimum climb of 310 feet per NM to 7700.</div> <div><div>MALSR</div><div><div></div><div></div></div></div> <div>MISSED APPROACH:<br/>Climbing right turn to 10000<br/>direct PIMIE and hold, continue<br/>climb-in-hold to 10000.</div> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                 |                                   |                          |
|-----------------|-----------------------------------|--------------------------|
| ASOS<br>135.275 | SALT LAKE CENTER<br>127.7 354.125 | UNICOM<br>122.8 (CTAF) 0 |
|-----------------|-----------------------------------|--------------------------|

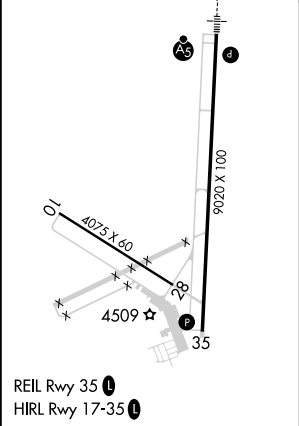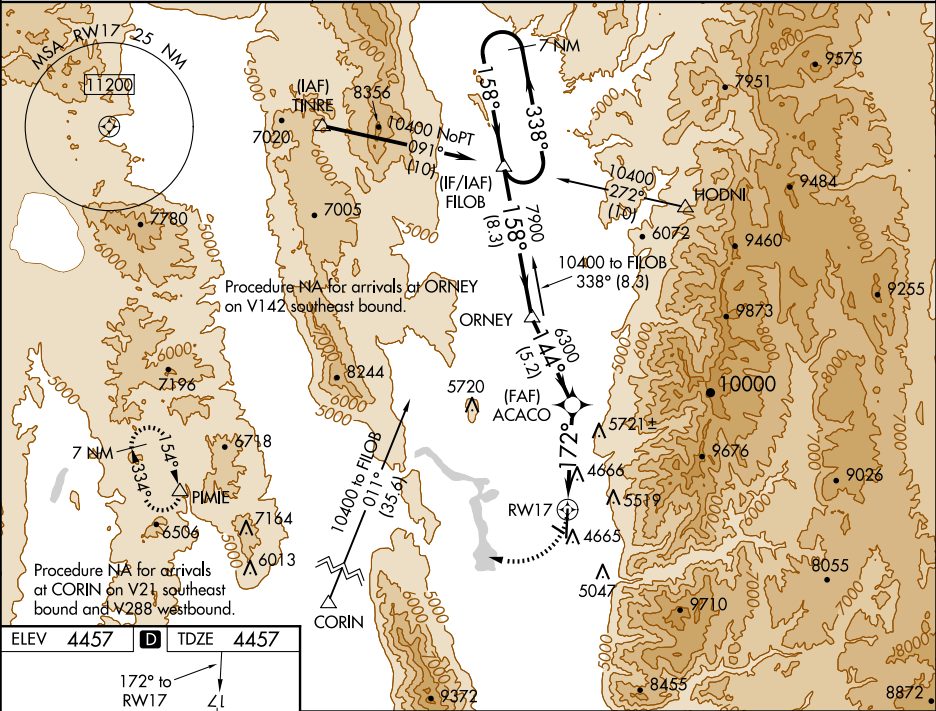

|                  |                                 |                                                                  |            |                      |  |
|------------------|---------------------------------|------------------------------------------------------------------|------------|----------------------|--|
| 10000 PIMIE      |                                 | VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45). |            | 7 NM Holding Pattern |  |
| ACACO            |                                 | ORNEY                                                            |            | FLOBO                |  |
| 1.9 NM to RWY 17 |                                 | 3.00° TCH 50                                                     |            | 7900                 |  |
| 172°             |                                 | 144°                                                             |            | 158°                 |  |
| 6300             |                                 | 7900                                                             |            | 10400                |  |
| 1.9              |                                 | 3.7 NM                                                           |            | 5.2 NM               |  |
| 8.3 NM           |                                 |                                                                  |            |                      |  |
| CATEGORY         | A                               | B                                                                | C          | D                    |  |
| *LNAV MDA        | 5100-1/2                        | 643 (700-1/2)                                                    | 5100-1 3/8 | 643 (700-1 3/8)      |  |
| LNAV MDA         | 5800-3/4<br>1343 (1400-3/4)     | 5800-1<br>1343 (1400-1)                                          | 5800-3     | 1343 (1400-3)        |  |
| CIRCLING         | 5800-1 1/4<br>1343 (1400-1 1/4) | 5800-1 1/2<br>1343 (1400-1 1/2)                                  | 5800-3     | 1343 (1400-3)        |  |