


RNAV (GPS) Y RWY 13
ATLANTIC CITY INTL (ACY)

T For inoperative MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½, and LNAV Cat D visibility to RVR 6000, Cat E visibility to 1½. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).

MISSED APPROACH: Climb to 2000
direct JURAD and on track 076° to
RODDI and hold.

ATIS 125.725 316.15	ATLANTIC CITY APP CON 124.6 327.125	ATLANTIC CITY TOWER 120.3 239.0	GND CON 121.9 284.6	CLNC DEL 127.85 353.775
------------------------	--	------------------------------------	------------------------	----------------------------

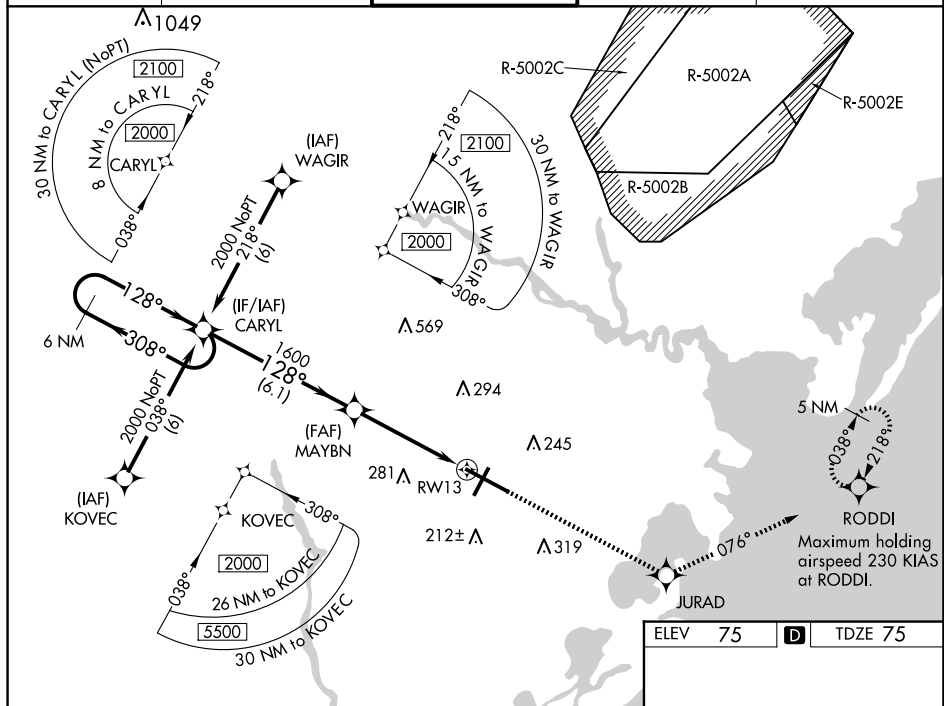

NE-2, 17 APR 2025 to 15 MAY 2025

