

RIVERTON, WYOMING

AL-691 (FAA)

20310


WAAS CH 42899 W10A	APP CRS 104°	Rwy Idg 8204 TDZE 5516 Apt Elev 5516
--	------------------------	---

RNAV (GPS) RWY 10
CENTRAL WYOMING RGNL (RIW)



⚠ **DME/DME RNP-0.3 NA.** When local altimeter setting not received, use Lander altimeter setting and increase all DA 54 feet and all MDA 60 feet, and increase LPV and LNAV/VNAV all Cats visibility $\frac{1}{2}$ mile and increase LNAV Cat C/D visibility $\frac{1}{8}$ mile. Baro-VNAV and VDP NA when using Lander altimeter setting. Rwy 10 helicopter visibility reduction below $\frac{3}{8}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 48°C (118°F).

MISSED APPROACH: Climb to 8600 direct DONVY and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------

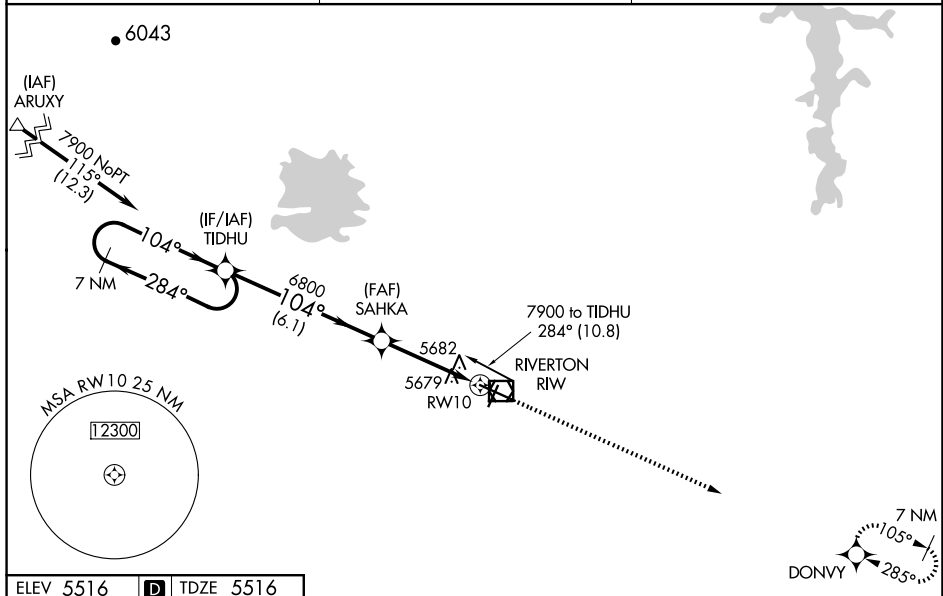

ELEV 5516	D	TDZE 5516
-----------	----------	-----------

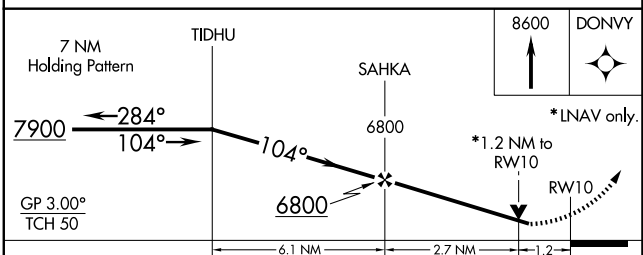

CATEGORY	A	B	C	D
LPV DA	5902-1¼ 386 (400-1¼)			
RNAV/ VNAV DA	5965-1½ 449 (500-1½)			
RNAV MDA	5940-1 424 (500-1)		5940-1¼ 424 (500-1¼)	
CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½)	6120-2 604 (700-2)

RIVERTON, WYOMING

Amdt 2B 12OCT17

43°04'N-108°28'W

CENTRAL WYOMING RGNL (RIW)
RNAV (GPS) RWY 10

NW-1, 17 APR 2025 to 15 MAY 2025