

VOR/DME RIW 114.05 Chan 87(Y)	APP CRS 293°	Rwy Idg TDZE Apt Elev	8204 5459 5516
---	------------------------	-----------------------------	---


VOR RWY 28
CENTRAL WYOMING RGNL (RIW)

⚠ When local altimeter setting not received, use Lander altimeter setting and increase all MDA 60 feet. VDP NA when using Lander altimeter setting. For inop MALSRL, increase S-28 Cat C and D visibility to 1½ miles.

MALSRL

MISSED APPROACH: Climb to 7700 in RIW VOR/DME holding pattern.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

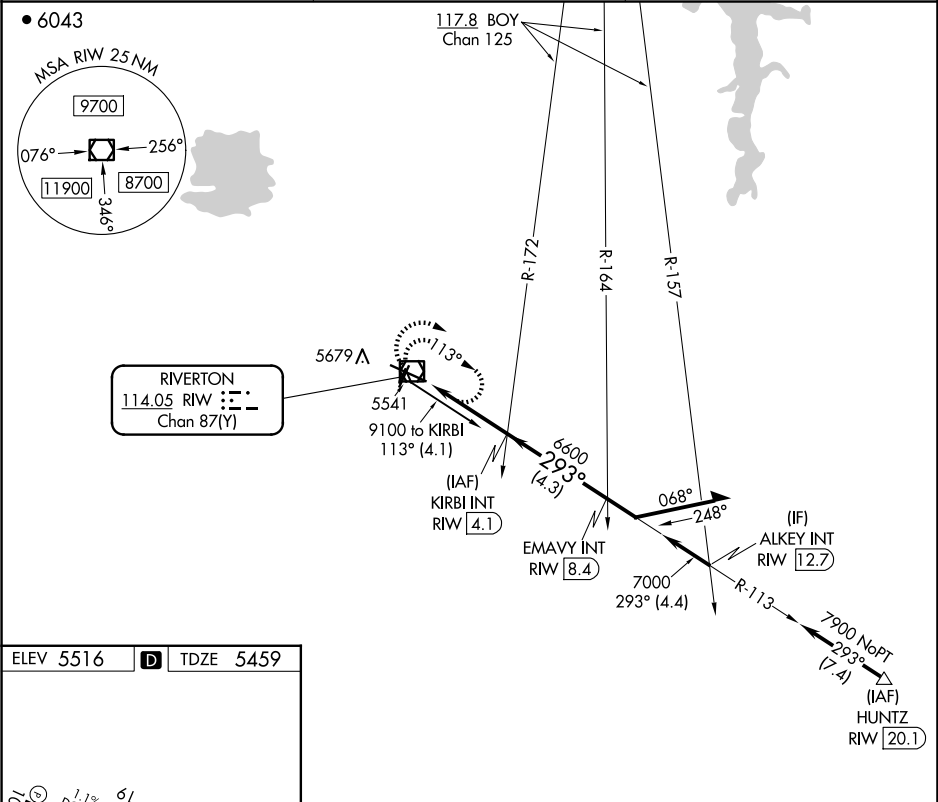

ELEV 5516 **D** TDZE 5459

REIL Rwy 1, 10 and 19 0

MIRL Rwy 1-19 0

HIRL Rwy 10-28 0

7700 RIW

KIRBI INT RIW 4.1

RIW 1.9

RIW VOR/DME

2.99° TCH 50

6600

113°

293°

7900

Remain within 10 NM

CATEGORY	A	B	C	D
S-28	5920-½ 461 (500-½)		5920-1 461 (500-1)	
C CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½)	6120-2 604 (700-2)

NW-1, 17 APR 2025 to 15 MAY 2025

NW-1, 17 APR 2025 to 15 MAY 2025