

WAAS CH 48804 W24A	APP CRS 236°	Rwy Idg 5504 TDZE 63 Apt Elev 67
--	------------------------	---

RNAV (GPS) RWY 24
MARTHA'S VINEYARD (MVY)


⚠ For uncompensated Baro-VNAV systems, INAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase INAV/VNAV all Cats visibility to RVR 5200; increase INAV Cats C/D visibility to RVR 5000; increase Circling visibility Cts C to 2 miles and D to 2 1/2 mile. For inop MALSR, increase INAV/VNAV all Cats visibility to 1 1/2 mile. For inop MALSR using Hyannis altimeter setting, increase LPV all Cats visibility to RVR 4000, INAV/VNAV all Cats visibility to 1 1/2 mile and increase INAV Cats C/D visibility to 1 1/2 mile. VDP and Baro-VNAV NA when using Hyannis altimeter setting. Night landing: Rwy 15 NA. ** RNP 1800 authorized with use of FD or AP or HUD to DA, NA when using Hyannis altimeter setting.

MALSR



MISSED APPROACH:
Climb to 500 then
climbing left turn to
2500 direct CLAMY
and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	CLNC DEL 124.35	CLNC DEL 119.7 (When twr closed)	UNICOM 122.95
-----------------------	---------------------------------	--	--------------------------	---------------------------	---	-------------------------

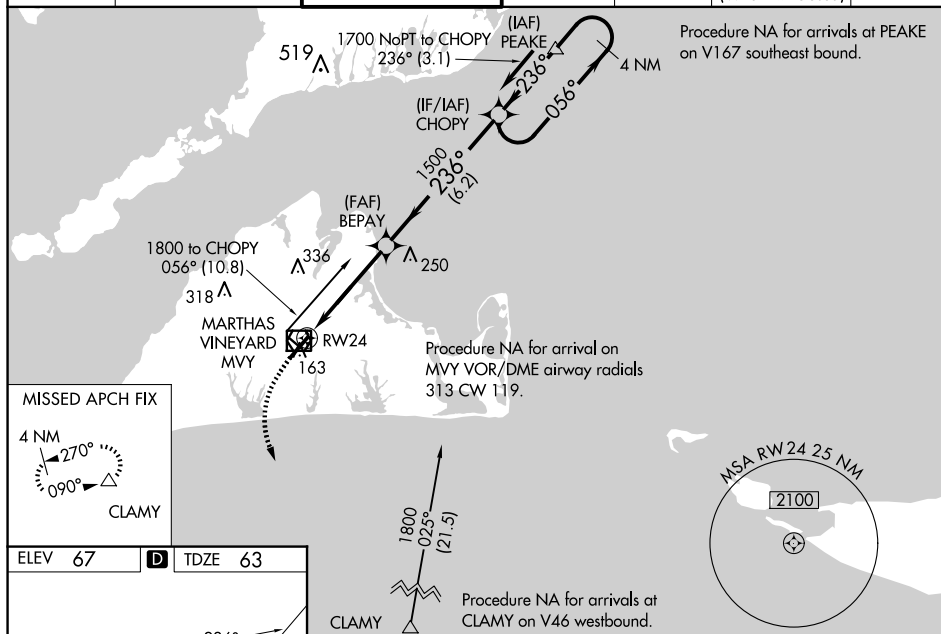

CATEGORY	A	B	C	D
LPV DA	** 263/24		200 (200-½)	
LNAV/DA VNAV	480/47		417 (500-1)	
LNAV MDA	500/24 437 (500-½)		500/40 437 (500-¾)	
C CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)