
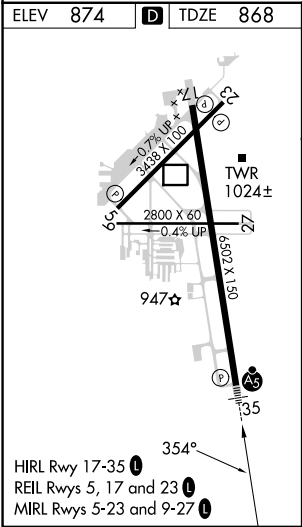


LOC I-AZO 110.9	APP CRS 354°	Rwy Idg TDZE 6502 868 Apt Elev 874
---------------------------	------------------------	--

ILS or LOC RWY 35
KALAMAZOO/BATTLE CREEK INTL (AZO)

ADF required. DME required for LOC only. RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 2000 then climbing left turn to 2800 direct AUSTN LOM/AZO 6.4 DME and hold.
▼ ▲ NA DME from AZO DME. DME use requires simultaneous reception of I-AZO and AZO DME. Circling Rwy 5, 9, 23, 27 NA at night. When local altimeter setting not received, use Battle Creek altimeter setting: increase S-ILS 35 DA to 1112 feet; increase all MDAs 60 feet and visibility S-LOC 35 Cat C/D to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Battle Creek altimeter setting).			

ATIS 127.25	GREAT LAKES APP CON ★ 121.2 239.25	KALAMAZOO TOWER ★ 118.3 (CTAF) 0 257.875	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

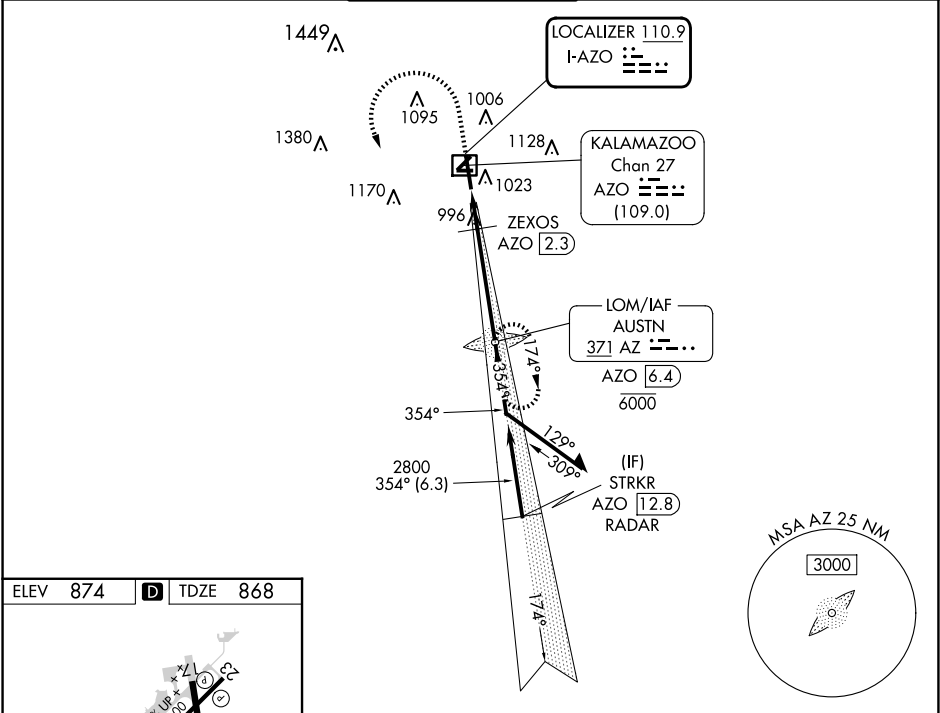

2000 ↑		2800 ↖		AUSTN LOM AZO 6.4		AUSTN LOM AZO 6.4 6000 2710 174° Remain within 10 NM	
AZO 0.8 ↙		ZEXOS AZO 2.3		1400 2800 354° 2800		GS 3.00° TCH 53	
1.5 NM		4.1 NM					
CATEGORY	A		B		C		D
S-ILS 35*	1068/24 200 (200-½)						
S-LOC 35	1260/24 392 (400-½)		1260/35 392 (400-¾)				
CIRCLING	1340-1 466 (500-1)		1480-1¾ 606 (700-1¾)		1480-2 606 (700-2)		