

WAAS CH 57933 W17A	APP CRS 174°	Rwy Idg TDZE Apt Elev	6502 867 874
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 17
KALAMAZOO/BATTLE CREEK INTL (AZO)

RNP APCH - GPS

⚠ Rwy 17 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV NA when using Battle Creek altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling Rwy 5, 9, 23, 27 NA at night. When local altimeter setting not received, use Battle Creek altimeter setting: increase LPV DA to 1200 feet, LNAV/VNAV DA to 1229 feet; increase all MDAs 60 feet.

MISSED APPROACH:
Climb to 2800 direct
COVAV and hold.

ATIS 127.25	GREAT LAKES APP CON ★ 121.2 239.25	KALAMAZOO TOWER ★ 118.3 (CTAF) 0 257.875	GND CON 121.9	CLNC DEL 121.75	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

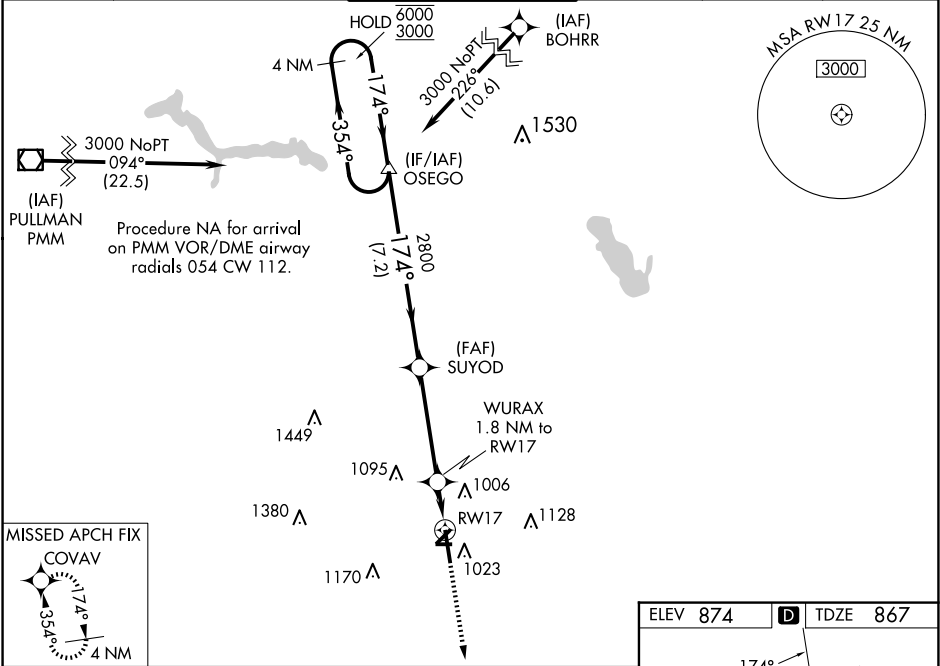

4 NM

Holding Pattern

OSEGO

SUYOD

WURAX
1.8 NM to
RW17

RW17

2800

COVAV

6000

3000

← 354°

174° →

174°

2800

1460

GP 3.00°

TCH 45

7.2 NM

4.2 NM

1.8

CATEGORY	A	B	C	D
LPV DA	1156-1		289 (300-1)	
LNAV/ VNAV DA	1185-1		318 (400-1)	
LNAV MDA	1320-1	453 (500-1)	1320-1 $\frac{3}{8}$	453 (500-1 $\frac{3}{8}$)
CIRCLING	1380-1	506 (600-1)	1480-1 $\frac{3}{4}$ 606 (700-1 $\frac{3}{4}$)	1480-2 606 (700-2)

