
STPHN THREE DEPARTURE (RNAV)

TOP ALTITUDE: ASSIGNED BY ATC

TAKEOFF MINIMUMS:

Rwys 13, 17L/R, 31, 35L/R: Standard with minimum climb of 500' per NM to 2100.

ATIS 128.725 GND CON WILEY POST TOWER * 126.9 306.9 OKE CITY DEP CON 124.6 266.8

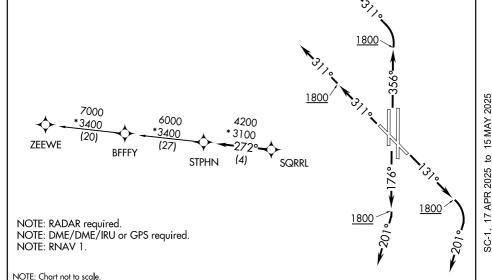

V

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to SQRRL, thence TAKEOFF RWYS 17L/R: Climb on heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to SQRRL, thence TAKEOFF RWY 31: Climb on heading 311° to 1800, then heading 311° or as assigned by ATC, expect RADAR vectors to SQRRL, thence TAKEOFF RWYS 35L/R: Climb on heading 356° to 1800, then left turn heading 311° or as assigned by ATC, expect RADAR vectors to SQRRL, thence

. . . . on track 272° to STPHN, then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

BFFFY TRANSITION (STPHN3.BFFFY): ZEEWE TRANSITION (STPHN3.ZEEWE):