

APP CRS
001°

Rwy Idg
TDZE
534

Apt Elev
537

RNAV (GPS) RWY 36

VANDALIA MUNI (VLA)

RNP APCH - GPS.


▼

▲

Rwy 36 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Salem altimeter setting; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2400 direct LITIC and hold.

AWOS-AV 122.8	KANSAS CITY CENTER 124.3 269.15	UNICOM 122.8 (CTAF) 1
-------------------------	---	---------------------------------

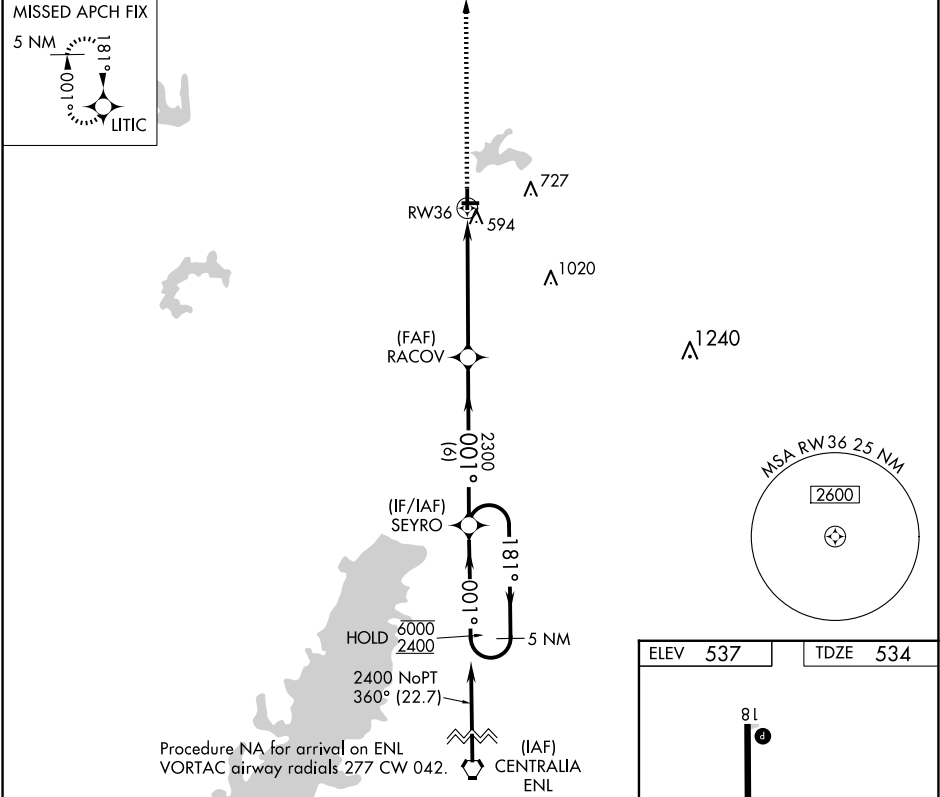

5 NM Holding Pattern

SEYRO

6000

2400

181°

001°

RACOV

2300

1.4 NM to RWY36

3.05°

TCH 40

6 NM

4 NM

1.4 NM

2400

LITIC

CATEGORY	A	B	C	D
LNAV MDA	1020-1	486 (500-1)	1020-1⅓	486 (500-1⅓)
CIRCLING	1040-1	503 (600-1)	1060-1½ 523 (600-1½)	1220-2¼ 683 (700-2¼)

81

3751 X 100

3001 X 75

27

582

36

001°

REIL Rwy 18, 27 and 36 1

MIRL Rwy 9-27 and 18-36 1

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025