


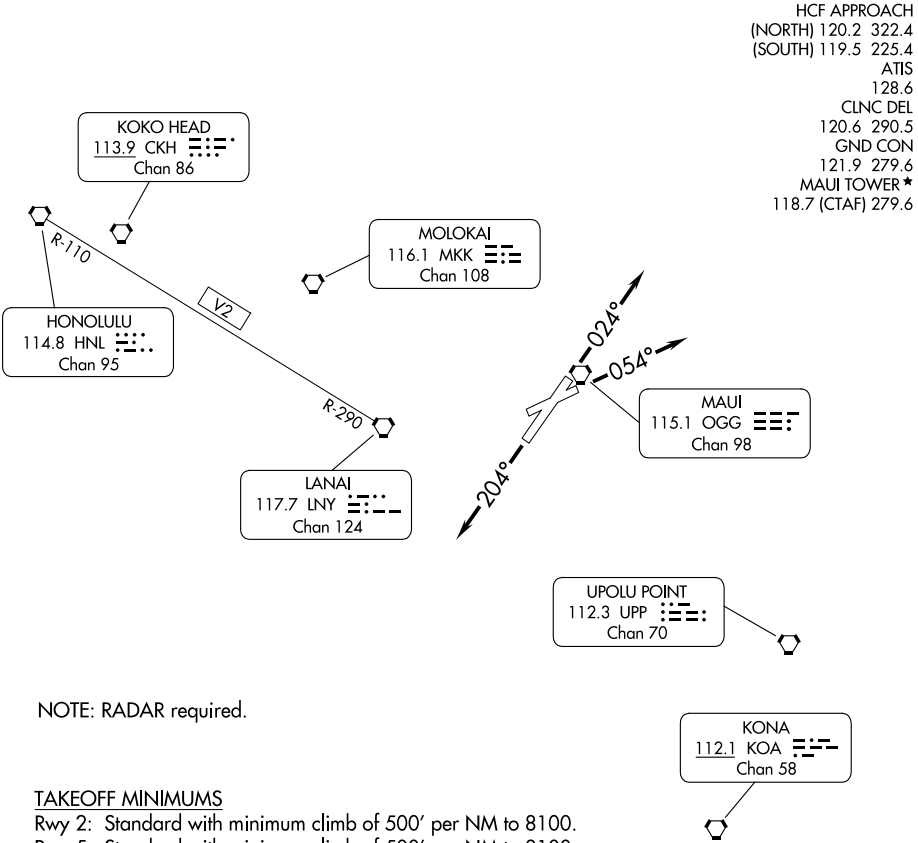

TAKEOFF MINIMUMS
Rwy 2: Standard with minimum climb of 500' per NM to 8100.
Rwy 5: Standard with minimum climb of 500' per NM to 8100.
Rwy 20: Standard with minimum climb of 490' per NM to 8100.
Rwy 23: NA - Obstacles.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAY 2:** Climb heading 024° (or ATC assigned heading 310° CW 053°);
thence. . .
- TAKEOFF RUNWAY 5:** Climbing heading 054° (or ATC assigned heading 307° CW 054°);
thence. . .
- TAKEOFF RUNWAY 20:** Climb heading 204° (or ATC assigned heading 169° CW 204°);
thence. . .
- TAKEOFF RUNWAY 23:** NA - Obstacles.

. . . expect RADAR vectors to join assigned route. Maintain assigned altitude; expect filed altitude/flight level 5 minutes after departure.

LOST COMMUNICATIONS: If not in contact with departure control 1 minute after departure, climb southbound to join V2 to LNY VORTAC, then on assigned route.