

24249

WAAS CH 90241 W35A	APP CRS 349°	Rwy Idg 7000 TDZE 5274 Apt Elev 5274
--	------------------------	---


RNAV (GPS) Z RWY 35
VERNAL RGNL (VEL)

RNP APCH.

T Rwy 35 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
A For uncompensated Baro-VNAV systems, procedure NA
❄ below -21°C or above 54°C.

MISSED APPROACH: Climb to 7000 then climbing right turn to 10000 direct OHAPE and hold.
***Missed approach requires minimum climb of 290 feet per NM to 8600.**

ASOS 118.125	SALT LAKE CENTER 119.95 377.15	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

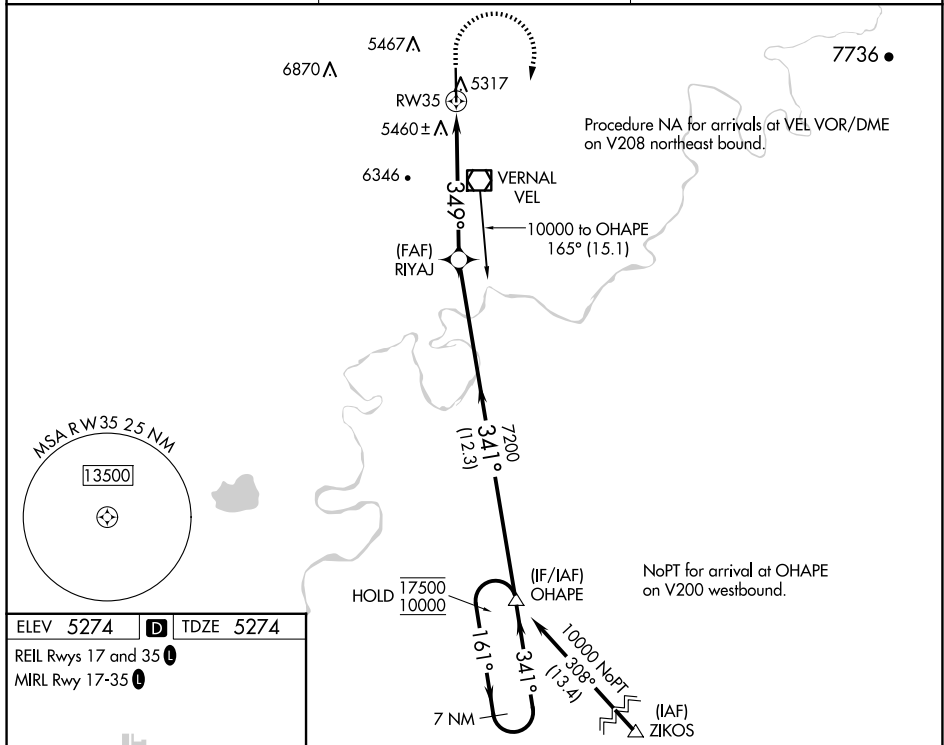

7000 10000 OHAPE VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48). OHAPE 7 NM Holding Pattern

5325 ☆ 7000 X100 35 349°

RW35 7200 341° 161° 17500 10000 GP 3.10° TCH 60

5.7 NM 12.3 NM

CATEGORY	A	B	C	D
LPV DA*	5610-1	336 (400-1)		
LPV DA	6175-2½	901 (1000-2½)		
RNAV/VNAV DA*	5786-1⅓	512 (600-1⅓)		
RNAV/VNAV DA	6093-2½	819 (900-2½)		

VERNAL, UTAH
Orig-B 22APR21

40°26'N-109°31'W

VERNAL RGNL (VEL)

RNAV (GPS) Z RWY 35

SW-4, 17 APR 2025 to 15 MAY 2025