

WAAS	APP CRS	Rwy Idg	5342
CH 97421	053°	TDZE	124
W05A		Apt Elev	125

RNAV (GPS) RWY 5

LUMBERTON RGNL (LBT)

RNP APCH - GPS.


▼

▲

When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 383 feet; LNAV/VNAV DA to 594 feet and all visibility ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C and Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 2000 direct
WIVGA and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
-----------------	--------------------------------------	--------------------------

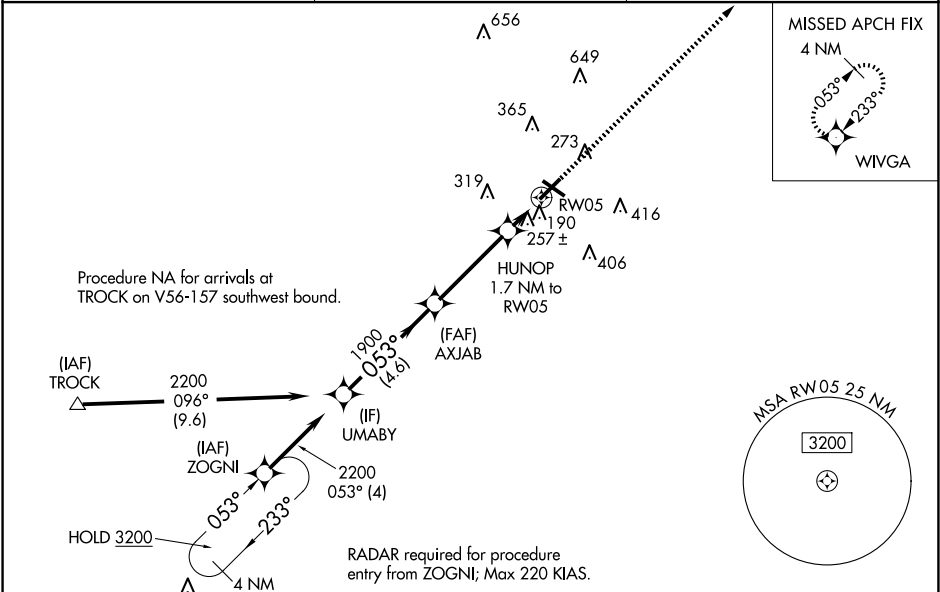

2114				ELEV 125	TDZE 124	
UMABY AXJAB HUNOP 1.7 NM to RW05 2000 WVGA Procedure Turn NA GP 3.00° TCH 60 2200 053° 1900 720* * LNAV only. 4.6 NM 3.7 NM 0.6 1.1						
CATEGORY	A	B	C	D		
LPV DA	327-¾ 203 (300-¾)			NA		
LNAV/VNAV DA	538-1⅛ 414 (500-1⅛)			NA		
LNAV MDA	520-1 396 (400-1)		520-1⅛ 396 (400-1⅛)	NA		
CIRCLING	660-1 535 (600-1)		720-1½ 595 (600-1½)	NA	MIRL Rwy 5-23 0 REIL Rws 5 and 23 0	

SE-2, 17 APR 2025 to 15 MAY 2025

SE-2, 17 APR 2025 to 15 MAY 2025