

WAAS
CH **63001**
W35A

APP CRS
355°

Rwy Idg **6002**
TDZE **532**
Apt Elev **548**

RNAV (GPS) RWY 35

COX FLD (PRX)


▼

▲

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Sulphur Springs altimeter setting and increase LPV DA to 859 feet, LNAV/VNAV DA to 1002 feet and all MDAs 80 feet; increase Circling Cats C/D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (118°F). Baro-VNAV and VDP NA when using Sulphur Springs altimeter setting.

MISSED APPROACH: Climb to 2200 direct PUYOS and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875	UNICOM 122.975 (CTAF) 1
----------------------------	-------------------------------------	-----------------------------------

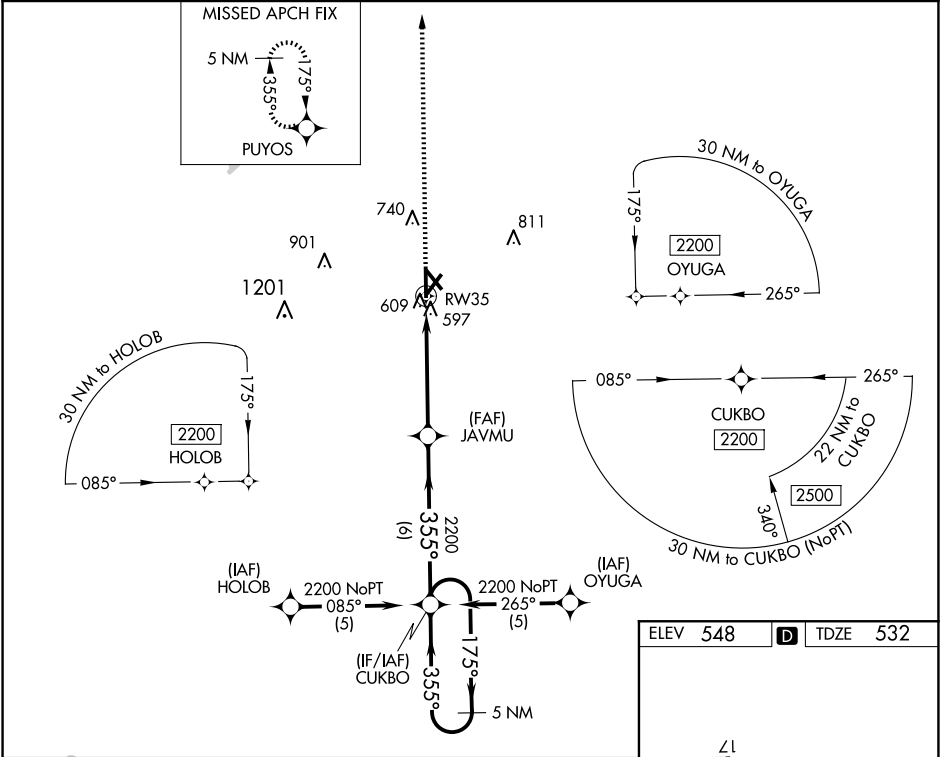

2200	PUYOS	JAVMU	CUKBO	5 NM Holding Pattern
* 0.9 NM to RW35 * LNAV only GP 3.00° TCH 53				
CATEGORY	A	B	C	D
LPV DA		782-3/4	250 (300-3/4)	
LNAV/ VNAV		925-1 1/4	393 (400-1 1/4)	
LNAV MDA		860-1	328 (400-1)	
CIRCLING	980-1 1/4 432 (500-1 1/4)	1060-1 1/4 512 (600-1 1/4)	1100-1 1/2 552 (600-1 1/2)	1220-2 1/4 672 (700-2 1/4)

ELEV 548

D

TDZE 532

35

355°

MIRL Rwy 17-35 1