

LOC I-GGG	APP CRS	Rwy Idg	9200
109.5	131°	TDZE	358
		Apt Elev	366

ILS or LOC RWY 13
EAST TEXAS RGNL (GGG)


ADF or DME required for procedure entry.

▼ For inop ALS, increase S-ILS 13 Cat E visibility to RVR 4000, S-LOC 13 Cat C/D/E visibility to 1 3/8 SM. When local altimeter setting not received use Gilmer altimeter setting and ▲ increase DA 59 feet, all MDA 60 feet, increase LOC and Circling Cat C/D/E visibility 1/4 SM. For inop ALS when using Gilmer altimeter setting increase S-ILS 13 all Cats to RVR 4500, S-LOC 13 Cat C/D/E visibility to 1 3/8 SM. * RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using Gilmer altimeter setting).

MALSR

MISSED APPROACH:
Climb to 3000 via GGG
VORTAC R-126 to
ARGEN Int/GGG 14 DME
and hold.

ATIS 119.65	LONGVIEW APP CON ★ 124.675 257.975	EASTEX TOWER ★ 119.2 (CTAF) 0377.05	GND CON 121.6	UNICOM 122.95
----------------	---------------------------------------	--	------------------	------------------

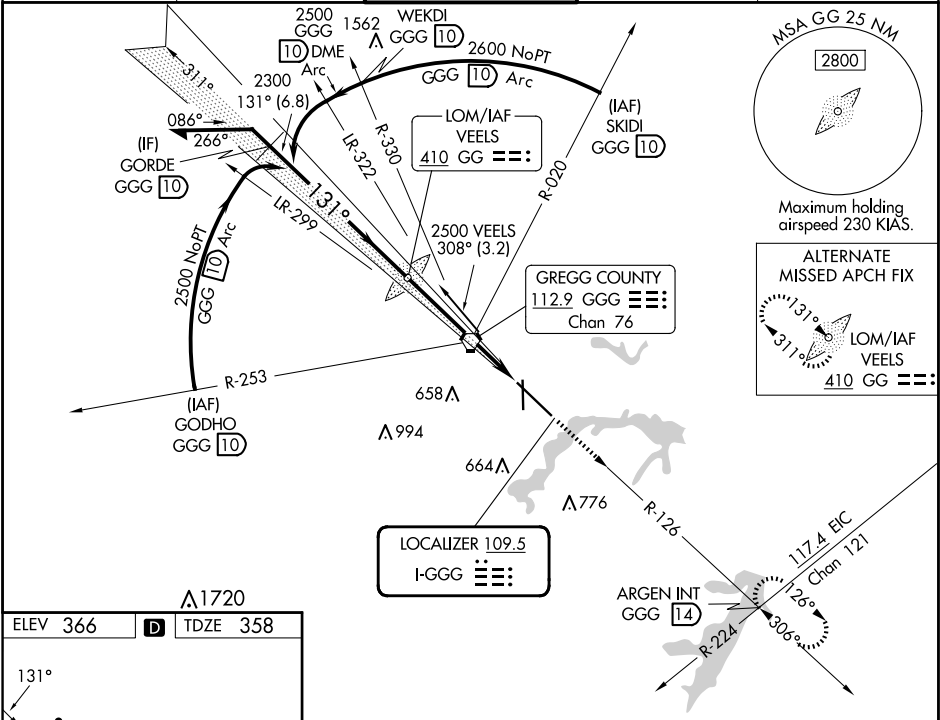


ELEV 366 D TDZE 358

HIRL Rwy 13-31
MIRL Rwy 18-36

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

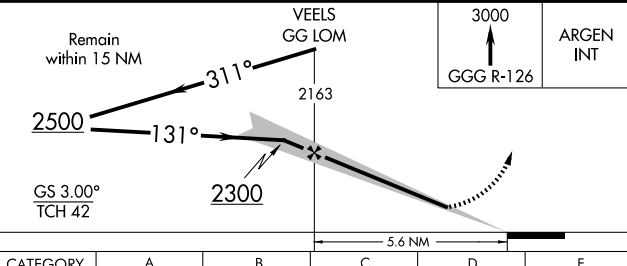 Remain within 15 NM 2500 311° 2163 131° 2300 GS 3.00° TCH 42 5.6 NM 3000 GGG R-126 ARGEN INT					
CATEGORY	A	B	C	D	E
S-ILS 13	*558/24 200 (200-½)				558/24 200 (200-½)
S-LOC 13	860/24	502 (500-½)	860/50	502 (500-1)	860/60 502 (500-1¼)
CIRCLING	860-1	494 (500-1)	980-1¾ 614 (700-1¼)	1080-2¼ 714 (800-2¼)	1080-2½ 714 (800-2½)

SC-2, 17 APR 2025 to 15 MAY 2025

SC-2, 17 APR 2025 to 15 MAY 2025