


WAAS CH 99426 W18A	APP CRS 176°	Rwy Idg TDZE 356 Apt Elev 366
--	------------------------	---

RNAV (GPS) RWY 18

EAST TEXAS RGNL (GGG)

RNP APCH - GPS.	Baro-VNAV and VDP NA when using Gilmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 18 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Gilmer altimeter setting and increase LPV DA to 689 feet, LNAV/VNAV DA to 711 feet and all MDA 60 feet; increase LPV visibility all Cats ½ SM and LNAV and Circling visibility Cats C/D ¼ SM.	MISSED APPROACH: Climb to 2400 direct AMUTE and on track 192° to PIPES and hold.
-----------------	---	---

ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER★ 119.2 (CTAF) 0377.05	GND CON 121.6	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

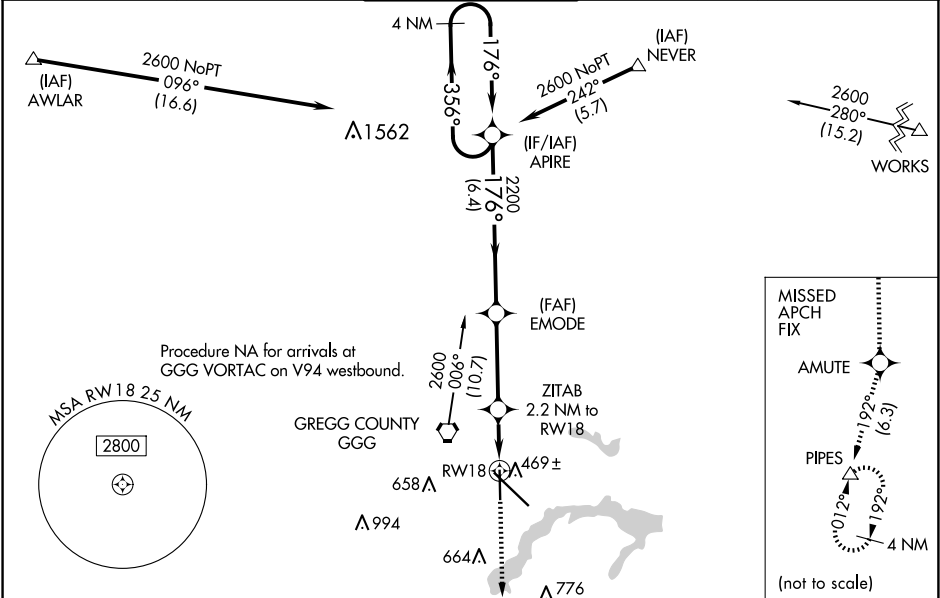

ELEV 366	D	TDZE 356	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 59).				2400	AMUTE	PIPES
				GP 3.00° TCH 53				tr 192°	△
				6.4 NM					
				3.4 NM					
				1.2 NM					
				1.0					
CATEGORY				A	B	C	D		
LPV DA				630-7/8 274 (300-7/8)					
LNAV/VNAV DA				652-1 296 (300-1)					
LNAV MDA				720-1 364 (400-1)					
CIRCLING				860-1 494 (500-1)		980-1 3/4 614 (700-1 3/4)		1080-2 1/4 714 (800-2 1/4)	