


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>78039</b><br><b>W22A</b> | APP CRS<br><b>220°</b> | Rwy Idg <b>4999</b><br>TDZE <b>892</b><br>Apt Elev <b>900</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 22  
ZANESVILLE MUNI (ZZV)

|                                                                                                                         |                                       |                                                             |
|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                         |                                       | MISSED APPROACH:<br>Climb to 2800 direct<br>RUTEE and hold. |
| ▼<br>▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.<br>Circling Rwy 16, 34 NA at night. |                                       |                                                             |
| ASOS<br>114.95                                                                                                          | INDIANAPOLIS CENTER<br>124.45 323.275 | UNICOM<br>123.0 (CTAF) 0★                                   |

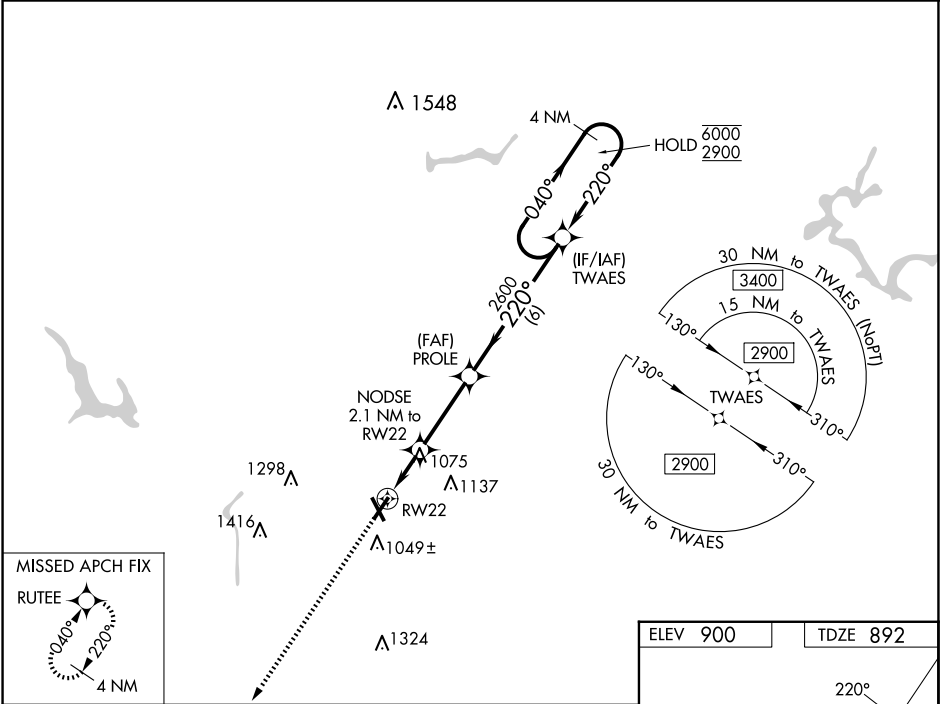

|              |                       |                         |                               |                               |                    |
|--------------|-----------------------|-------------------------|-------------------------------|-------------------------------|--------------------|
| 2800         | RUTEE                 |                         |                               |                               |                    |
|              |                       | NODSE<br>2.1 NM to RW22 | PROLE<br>2600                 | TWAES<br>4 NM Holding Pattern |                    |
|              |                       | 1.3 NM to RW22          | 1580                          | 2600                          | GP 3.00°<br>TCH 48 |
|              |                       | 1.3 NM                  | 0.8 NM                        | 3.2 NM                        | 6 NM               |
| CATEGORY     | A                     | B                       | C                             | D                             |                    |
| LPV DA       | 1092-3/4              |                         | 200 (200-3/4)                 |                               |                    |
| LNAV/VNAV DA | 1297-1 1/8            |                         | 405 (400-1 1/8)               |                               |                    |
| LNAV MDA     | 1340-1                | 448 (500-1)             | 1340-1 3/8                    | 448 (500-1 3/8)               |                    |
| CIRCLING     | 1380-1<br>480 (500-1) | 1420-1<br>520 (600-1)   | 1560-1 3/4<br>660 (700-1 3/4) | 1620-2 1/4<br>720 (800-2 1/4) |                    |

