

RNAV (GPS) RWY 32

SHREVEPORT RGNL (SHV)



T Rwy 32 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat A and B visibility to RVR 5500.

MALSR

MISSED APPROACH:
Climb to 2600 direct
BABYE and hold.

ATIS 128.45	SHREVEPORT APP CON 119.9 335.55	SHREVEPORT TOWER 121.4 236.775	GND CON 121.175 236.775	CLNC DEL 124.65
----------------	------------------------------------	-----------------------------------	----------------------------	--------------------

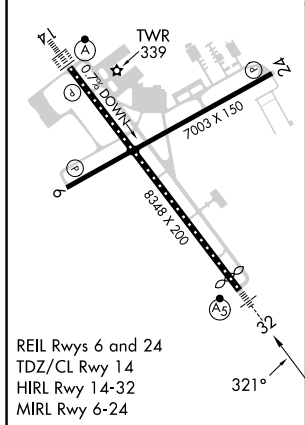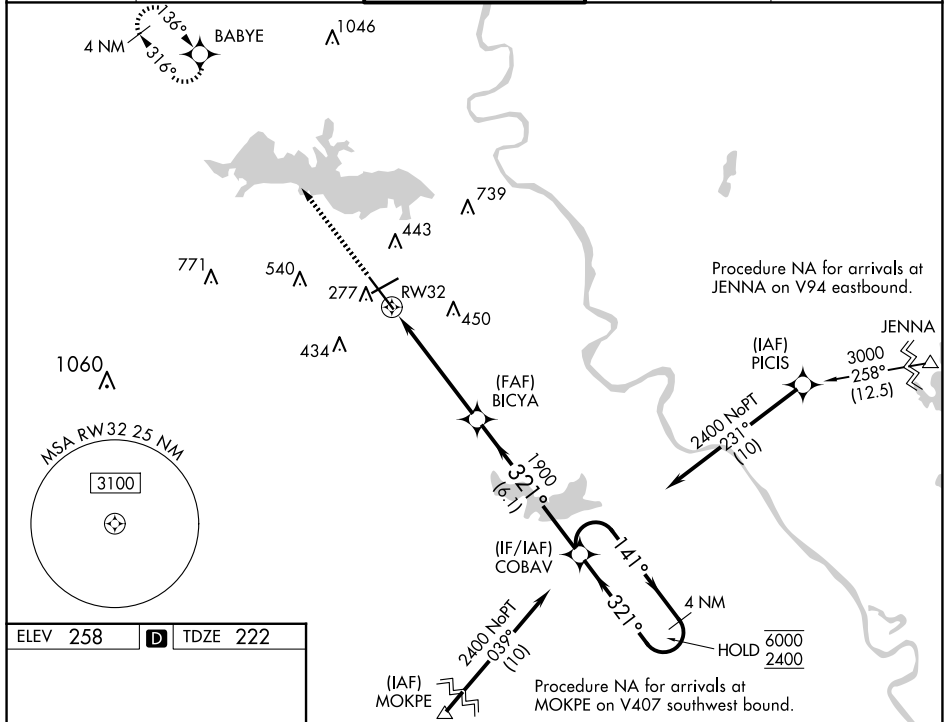

2600		BABYE					
*LNAV only.		1.3 NM 3.8 NM 6.1 NM 4 NM 141° 321° 1900 1900 GP 3.00° TCH 52				6000 2400	
CATEGORY	A	B	C	D			
LPV DA	422/40		200 (200-¾)				
LNAV/VNAV DA	629/40		407 (400-¾)				
LNAV MDA	680/40 458 (500-¾)		680/45 458 (500-7/8)				
CIRCLING	760-1 502 (600-1)		980-2 722 (800-2)		1100-2¾ 842 (900-2¾)		