

WAAS CH 87022 W29A	APP CRS 286°	Rwy Idg 5158 TDZE 314 Apt Elev 321
--	------------------------	---


RNAV (GPS) RWY 29
EASTERWOOD FLD (CLL)

RNP APCH.


T Baro-VNAV NA when using Caldwell altimeter setting.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. Rwy 29 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climb to 2000 direct ICESO and hold.

ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER ★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	CLNC DEL 128.7	CLNC DEL 120.4 (when trw closed)	UNICOM 122.95
-----------------------	--	---	-------------------------------	--------------------------	---	-------------------------

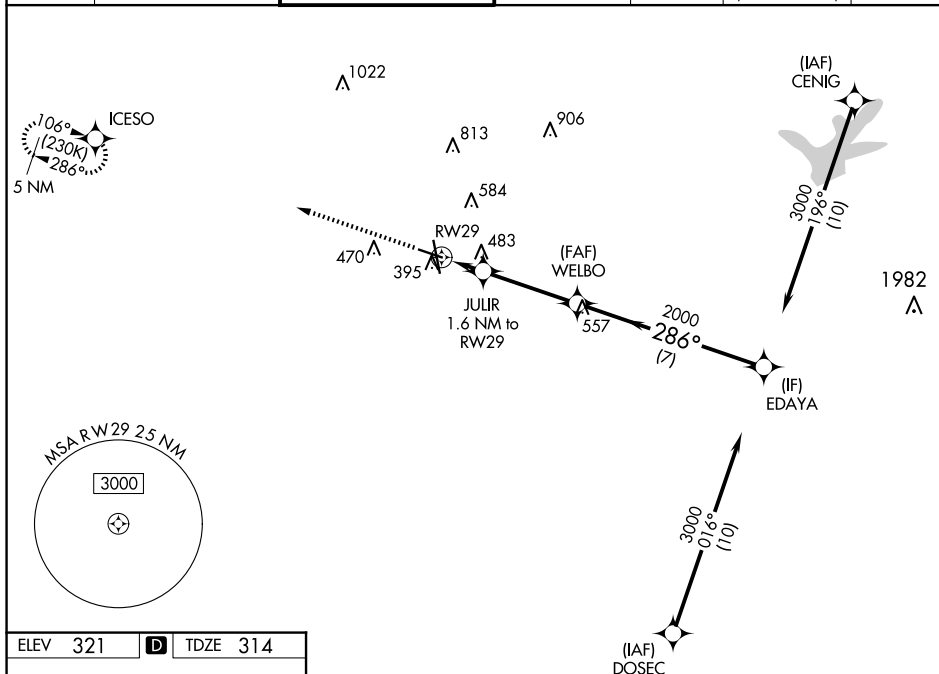

ELEV 321	D	TDZE 314
----------	----------	----------

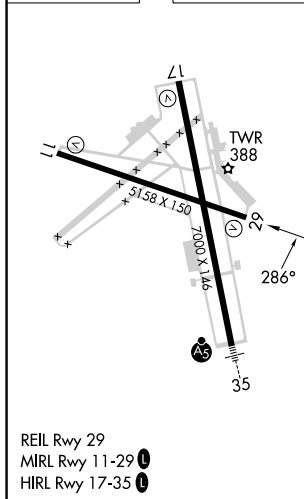

CATEGORY	A	B	C	D	E
LPV DA	564-3/4 250 (300-3/4)				
RNAV/VNAV DA	762-1 3/8 448 (500-1 3/8)				
LNAV MDA	740-1 426 (500-1)	740-1 1/4 426 (500-1 1/4)			
C CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2 3/4 859 (900-2 3/4)	1180-3 859 (900-3)