

WAAS CH 61399 W10A	APP CRS 108°	Rwy Idg TDZE 337 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 10

CAPE GIRARDEAU RGNL (CGI)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 585 feet, LNAV/VNAV DA to 761 feet, and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV Cat C/D visibility 1/8 SM, and Circling Cats C/D visibility to 1/4 SM. Baro-VNAV and VDP NA when using Cairo Rgnl altimeter setting. For inop ALS, increase LNAV/VNAV visibility all Cats and LNAV visibility Cat C/D to 1 SM. For inop ALS, when using Cairo altimeter setting, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH:

Climb to 3000 direct FISAV and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER★ 125.525 (CTAF)	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

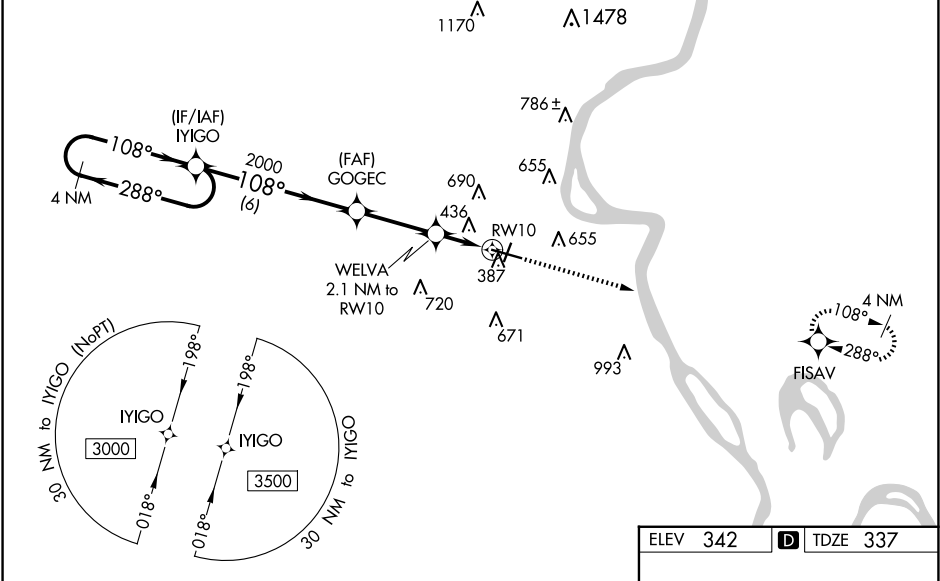

4 NM Holding Pattern

3000

288°

108°

GP 3.00°

TCH 54

MIGO

GOGEC

WELVA 2.1 NM to RWY10

RWY10

3000

FISAV

2000

1060

6 NM

3 NM

1.1 NM

1 NM

CATEGORY	A	B	C	D
LPV DA		537-1/2	200 (200-1/2)	
LNAV/VNAV DA		713-5/8	376 (400-5/8)	
LNAV MDA	700-1/2	363 (400-1/2)	700-5/8	363 (400-5/8)
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-13/4 658 (700-13/4)	1080-21/4 738 (800-21/4)

ELEV 342 TDZE 337

108°

02

6500 X 150

100

TWR 404

393

28

2

MIRL Rwy 2-20

HIRL Rwy 10-28