

LOC I-AYS 108.3	APP CRS 184°	Rwy Idg 5992 TDZE 140 Apt Elev 141
---------------------------	------------------------	---

ILS Z or LOC Z RWY 19



WAYCROSS-WARE COUNTY (AYS)

▼ ADF Required. When local altimeter setting not received, use Alma altimeter setting: increase DA to 390 feet and all MDA 60 feet; increase S-LOC 19 Cat C/D visibility ½ mile; increase Circling Cat C/D visibility ¼ mile. For inop MALS/R, increase S-LOC 19 Cat C/D visibility to 1 mile. For inop MALS/R when using Alma altimeter setting, increase S-LOC 19 Cat C/D visibility to 1½ mile. Increase SHOGI Fix Minimums S-LOC 19 Cat C/D visibility to 1½ mile. Night Landing Rwy 5, 31 NA.

MALS/R

MISSED APPROACH: Climb to 800 then climbing right turn to 1700 direct WIKET LOM and hold.

AWOS-3 118.575	JACKSONVILLE CENTER 127.575 269.025	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

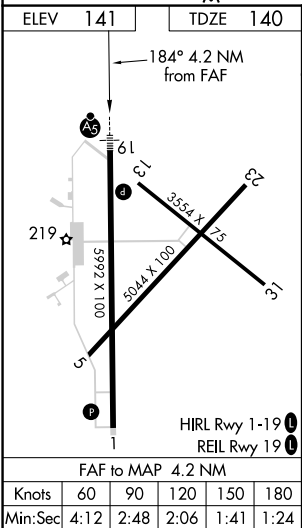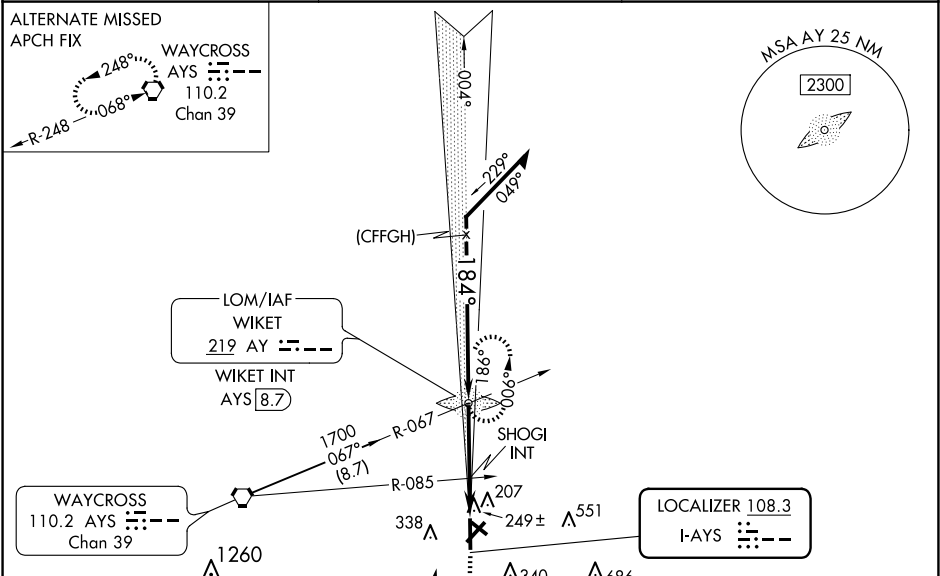

800 1700 AY

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).

*LOC only.

*600

*660 when using Alma altimeter setting.

CATEGORY	A	B	C	D
S-ILS 19	340-½		200 (200-½)	
S-LOC 19	600-½	460 (500-½)	600-¾	460 (500-¾)
CIRCLING	660-1	720-1	860-2	860-2¼
	519 (600-1)	579 (600-1)	719 (800-2)	719 (800-2¼)
SHOGI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 19	500-½	360 (400-½)	500-¾	360 (400-¾)
CIRCLING	660-1	720-1	860-2	860-2¼
	519 (600-1)	579 (600-1)	719 (800-2)	719 (800-2¼)