

# KNIK THREE DEPARTURE

TED STEVENS ANCHORAGE INTL (ANC) (PANC)  
AL-1500 (FAA) ANCHORAGE, ALASKA


**TOP ALTITUDE:  
FL200**

ANCHORAGE DEP CON  
118.6 290.5  
D-ATIS  
135.5  
CLNC DEL  
119.4 323.1  
GND CON  
121.9 338.25  
ANCHORAGE TOWER  
118.3 257.8

TALKEETNA  
116.2 TKA -  
Chan 109

BIG LAKE  
112.5 BQG -  
Chan 72

△ NODLE  
13700

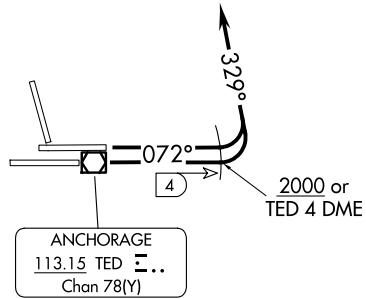

NOTE: RADAR required.  
NOTE: Aircraft cleared via NODLE FIX  
cross at or above 13700 for terrain.

### TAKEOFF MINIMUMS

Rwys 15, 25L/R, 33: NA-ATC.  
Rwy 7L: Standard with minimum climb of 253' per NM to 400.  
Rwy 7R: Standard with minimum climb of 285' per NM to 400.

NOTE: Chart not to scale.

### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb heading 072° to 2000 or TED 4 DME, whichever comes first, then climbing left turn heading 329° for vectors to assigned route or fix. Maintain FL200 or assigned altitude, expect filed altitude 10 minutes after departure.

All aircraft, climb as rapidly as practical through 3000, if unable to reach 2000 by TED 4 DME advise ATC prior to departure.

# KNIK THREE DEPARTURE