

WAAS CH 53635 W18A	APP CRS 175°	Rwy Idg 6080 TDZE 42 Apt Elev 46
--	------------------------	---

RNAV (GPS) RWY 18

CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to ¾ SM, all LNAV/VNAV visibilities to ¾ SM, and LNAV Cat C, D, and E visibility to 1¼ SM.


MALS

AS


MISSED APPROACH:

Climb to 500 then climbing left turn to 2000 direct SOLON and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

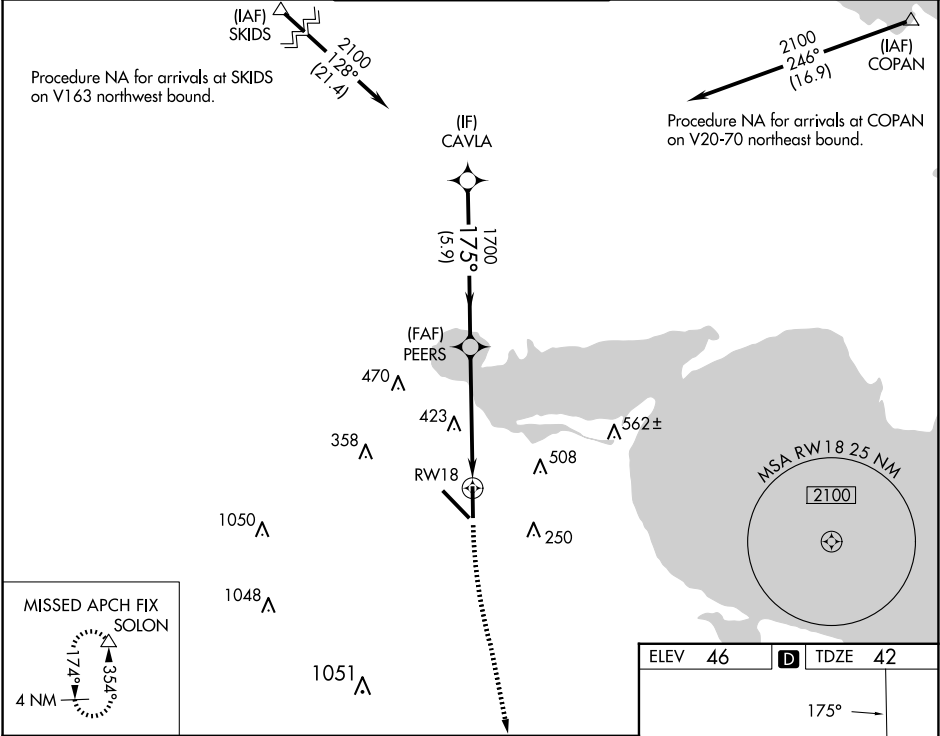

CAVLA		PEERS		RW18	
2100		1700		500 2000	
175°		1700		1.8 NM to RW18	
GP 3.00° TCH 50		5.9 NM		3.3 NM	
1.8 NM		1.8 NM		SOLON	
CATEGORY	A	B	C	D	E
LPV DA	242-½		200 (200-½)		
LNAV/VNAV DA	345-½		303 (300-½)		
LNAV MDA	660-½	618 (700-½)	660-1⅜		618 (700-1⅜)
CIRCLING	660-1 614 (700-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)

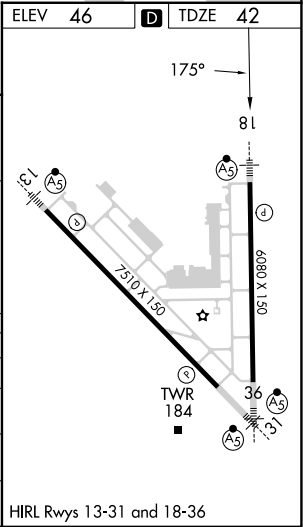

SC-3, 17 APR 2025 to 15 MAY 2025

SC-3, 17 APR 2025 to 15 MAY 2025