

WAAS
CH **60914**
W31A

APP CRS
312°

Rwy Idg **7510**
TDZE **43**
Apt Elev **46**

RNAV (GPS) Y RWY 31

CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.
▲ Procedure NA when Cabaniss Fld traffic patterns active. For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat E visibility to 1¾ SM.


MALS

AS

MISSED APPROACH:

Climb to 2000 direct
ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

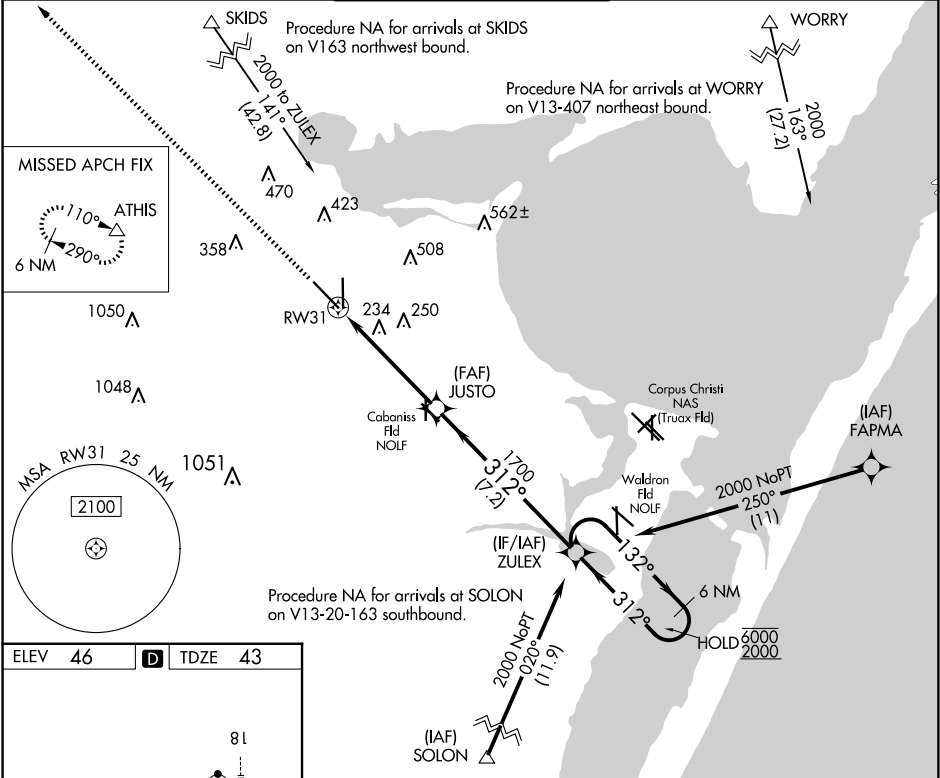

2000 ↑		ATHIS △			
-----------	--	------------	--	--	--

