


WAAS CH 99341 W21A	APP CRS 214°	Rwy Idg TDZE Apt Elev	7000 7003 7014
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


FLAGSTAFF PULLIAM (F'L.G)

▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to ¾ SM.	MALSR	MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.
--	--	--

ATIS 125.8	PHOENIX APP CON 126.375 236.775	FLAGSTAFF TOWER ★ 134.55 (CTAF) 239.25	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

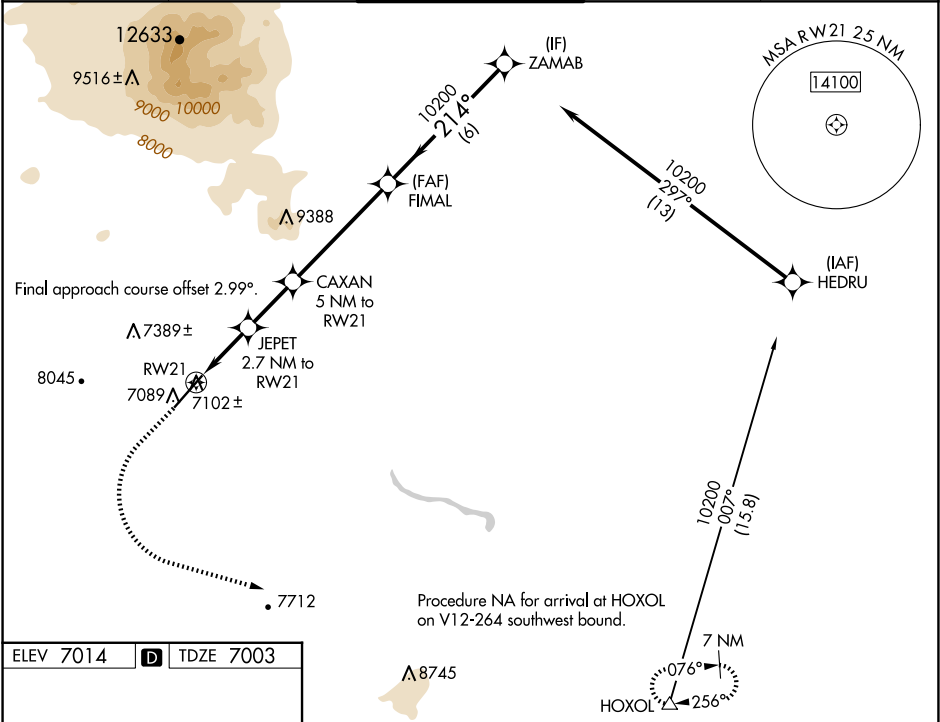

ELEV 7014	D	TDZE 7003
-----------	----------	-----------

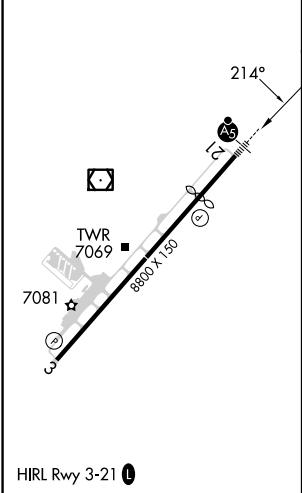

	7500	10800	HOXOL			FIMAL	ZAMAB
						10200	10200
						214°	10200
						8640*	GP 3.00° TCH 52
						7900*	
						1 NM	1.7 NM
						2.3 NM	4.9 NM
						6 NM	
CATEGORY	A		B		C		D
LPV DA	7258-½		255 (300-½)				
LNAV/VNAV DA	7319-⅝		316 (400-⅝)				
LNAV MDA	7360-½		357 (400-½)		7360-⅝		357 (400-⅝)
CIRCLING	7520-1		7560-1		8100-3		8560-3
	506 (600-1)		546 (600-1)		1086 (1100-3)		1546 (1600-3)