

WAAS
CH **90202**
W13A

APP CRS
133°

Rwy Idg **9033**
TDZE **1280**
Apt Elev **1317**

RNAV (GPS) RWY 13
ROCHESTER INTL (RST)

RNP APCH - GPS.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV ASR NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2900 direct POKYI and on track 241° to RST VOR/DME and hold.

ATIS 120.5	ROCHESTER APP CON★ 119.8 251.125	ROCHESTER TOWER★ 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

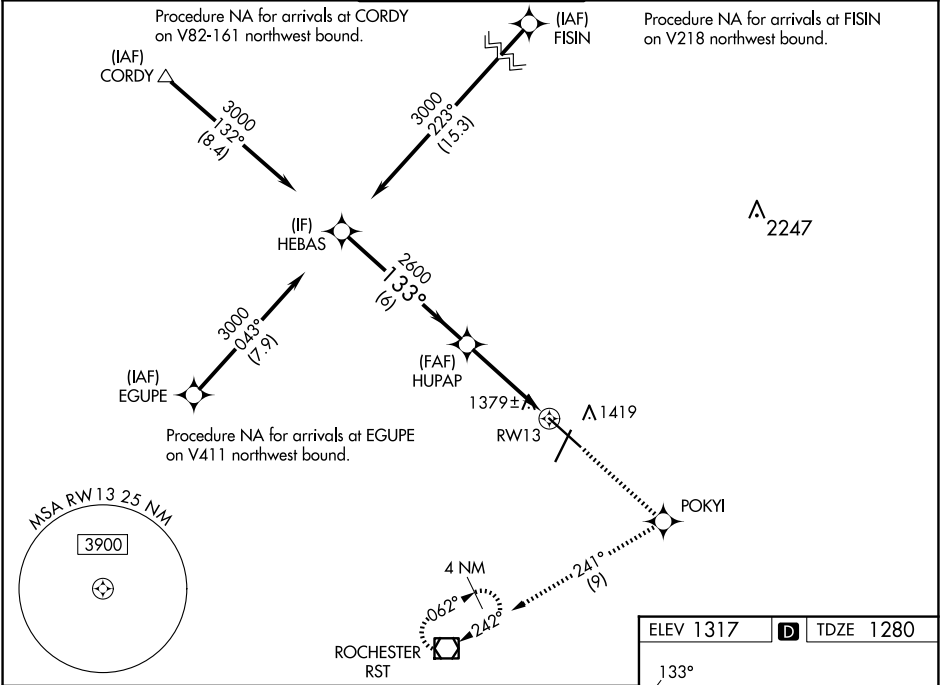

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).

HEBAS	HUPAP	POKYI	RST
3000	2600	2900	tr 241°
GP 3.00° TCH 53	1 NM to RW13		
6 NM	3 NM	1 NM	

CATEGORY	A	B	C	D
LPV DA	1530/18 250 (300-½)			
LNAV/VNAV DA	1679/50 399 (400-1)			
LNAV MDA	1640/24	360 (400-½)	1640/30 360 (400-¾)	1640/50 360 (400-1)
CIRCLING	1720-1 403 (500-1)	1780-1 463 (500-1)	1900-1½ 583 (600-1½)	1900-2 583 (600-2)

