
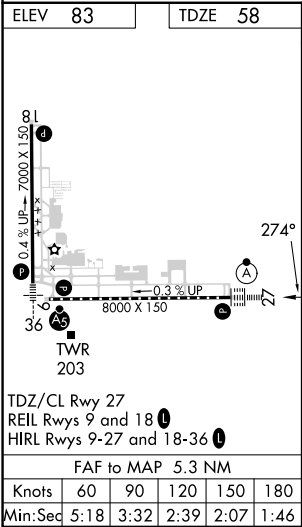


LOC/DME I-PLQ	APP CRS	Rwy Idg	8000
111.9	274°	TDZE	58
Chan 56		Apt Elev	83

ILS or LOC RWY 27

TALLAHASSEE INTL (TLH)

DME required.		ALSf-2	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000.			
For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cats C, D and E visibility to 2 SM. SPADD FIX MINIMUMS S-LOC 27 Cat E visibility to RVR 4000.						
ATIS		TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	CLNC DEL	UNICOM
119.45 239.25		135.8 317.4	118.7(CTAF) 257.8	121.9 348.6	126.65 275.8	123.075

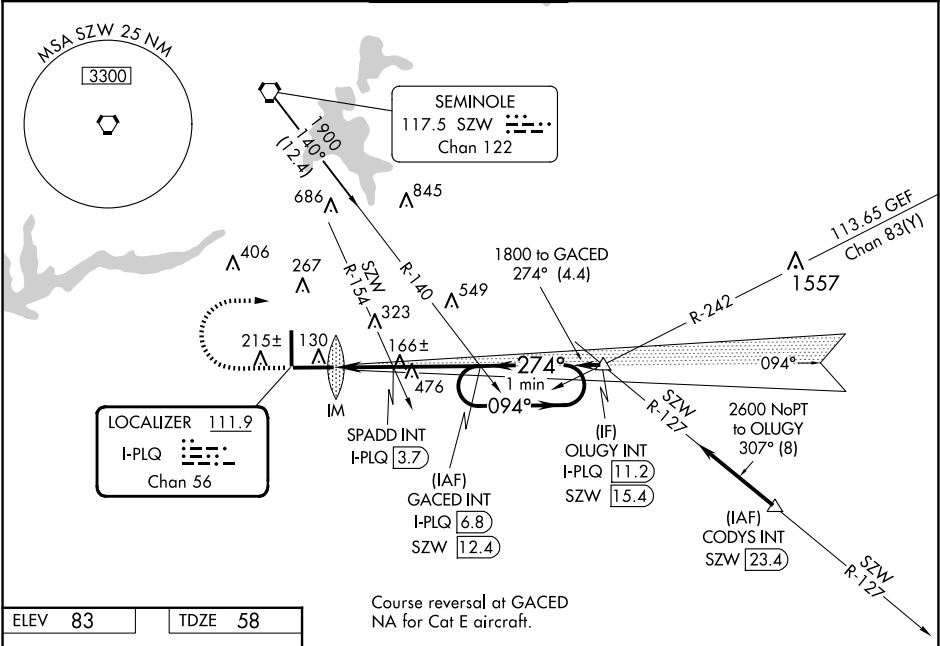

CATEGORY	A	B	C	D	E
S-ILS 27	258/18 200 (200-½)				
S-LOC 27	800/24 742 (800-½)	800/40 742 (800-¾)	800-1¾ 742 (800-1¾)		
CIRCLING	800-1 717 (800-1)	800-1¼ 717 (800-1¼)	800-2 717 (800-2)	800-2¼ 717 (800-2¼)	1000-3 917 (1000-3)
SPADD FIX MINIMUMS					
S-LOC 27	740/24	682 (700-½)	740-1½	682 (700-1½)	
CIRCLING	740-1	657 (700-1)	740-2 657 (700-2)	800-2¼ 717 (800-2¼)	1000-3 917 (1000-3)