WAAS CH 60900 W36A	APP CRS 004°	Rwy ldg 7000 TDZE 62 Apt Elev 83

RNAV (GPS) RWY 36
TALLAHASSEE INTL (TLH)

RNP APCH - GPS.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.

ATIS	TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	CLNC DEL	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) L 257.8	121.9 348.6	126.65 275.8	123.075

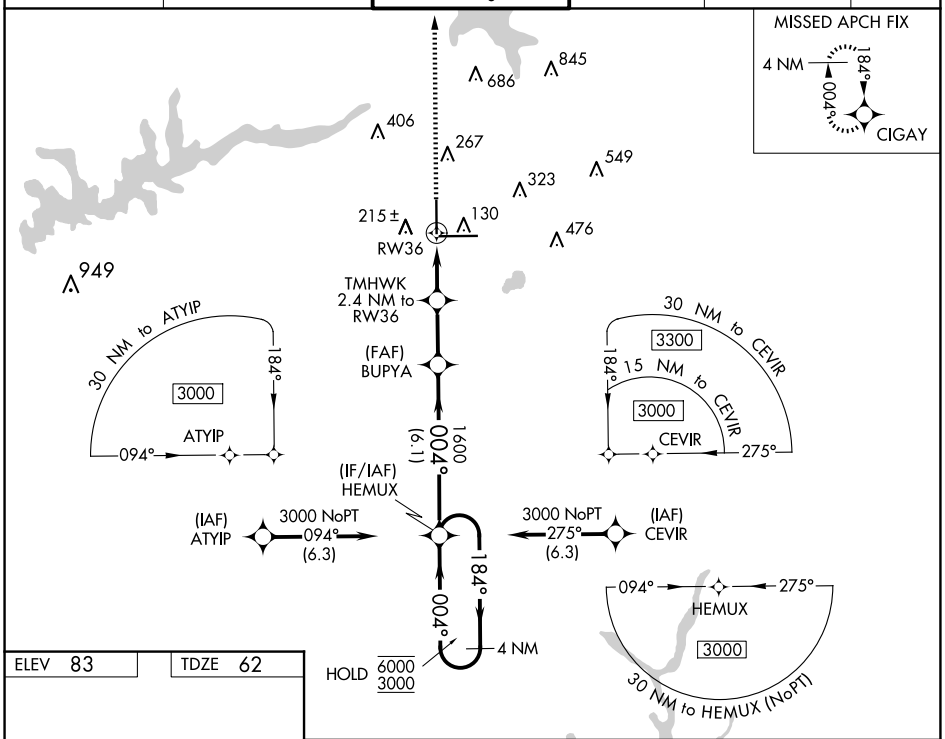

ELEV 83	TDZE 62

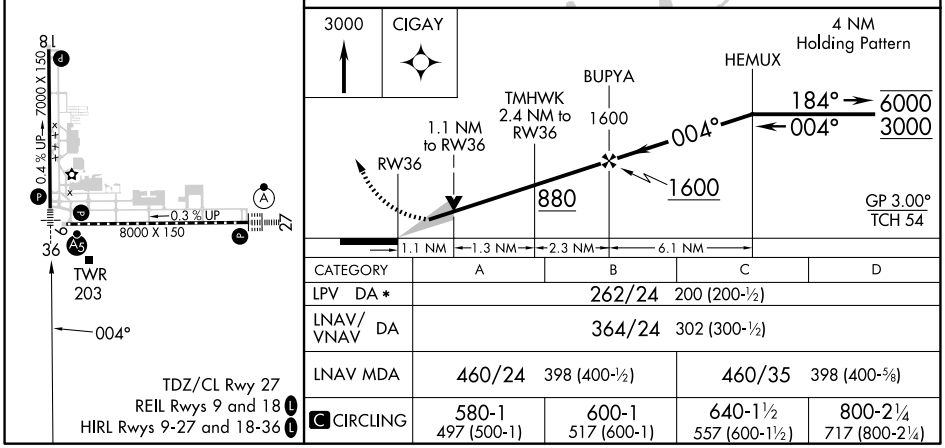

CATEGORY	A	B	C	D
LPV DA *	262/24 200 (200-½)			
LNAV/VNAV DA	364/24 302 (300-½)			
LNAV MDA	460/24 398 (400-½)		460/35 398 (400-⅝)	
C CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)

TDZ/CL Rwy 27
REIL Rwys 9 and 18 L
HIRL Rwys 9-27 and 18-36 L

SE-3, 17 APR 2025 to 15 MAY 2025