WAAS CH 45503 W09A	APP CRS 094°	Rwy ldg 8000 TDZE 66 Apt Elev 83

RNAV (GPS) RWY 9
TALLAHASSEE INTL (TLH)

RNP APCH.

Rwy 9 helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. ASR

MISSED APPROACH: Climb to 3000 direct FEKAD and hold.

ATIS	TALLAHASSEE APP CON ★	TALLAHASSEE TOWER ★	GND CON	CLNC DEL	UNICOM
119.45 239.25	135.8 317.4	118.7 (CTAF) L 257.8	121.9 348.6	126.65 275.8	123.075

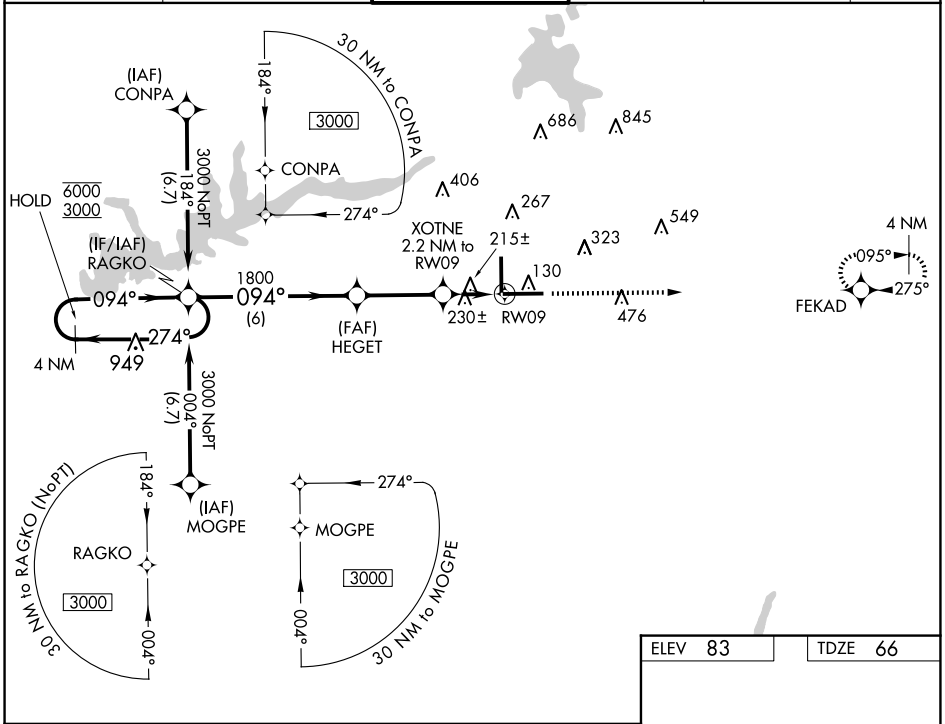

ELEV 83	TDZE 66

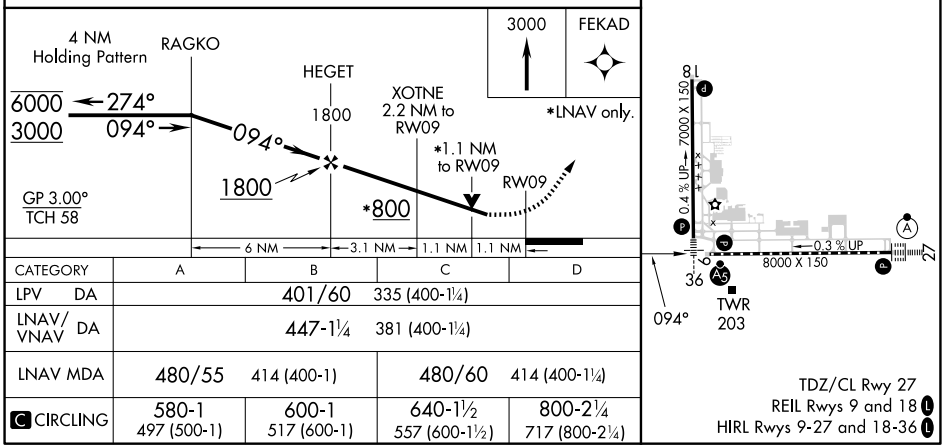

CATEGORY	A	B	C	D
LPV DA	401/60 335 (400-1¼)			
LNAV/VNAV DA	447-1¼ 381 (400-1¼)			
LNAV MDA	480/55 414 (400-1)		480/60 414 (400-1¼)	
C CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)

TDZ/CL Rwy 27
REIL Rwys 9 and 18 L
HIRL Rwys 9-27 and 18-36 L

SE-3, 17 APR 2025 to 15 MAY 2025