


WAAS CH 86511 W21A	APP CRS 211°	Rwy Idg 6028 TDZE 1110 Apt Elev 1110
--	------------------------	---

RNAV (GPS) RWY 21
STEVENS POINT MUNI (STE)

RNP APCH - GPS. V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cat C and D visibility to 1 1/2 SM. A		MALS A4 	MISSED APPROACH: Climb to 2800 direct FAYYE and hold.
AWOS-3 119.275	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.7 (CTAF) Q	

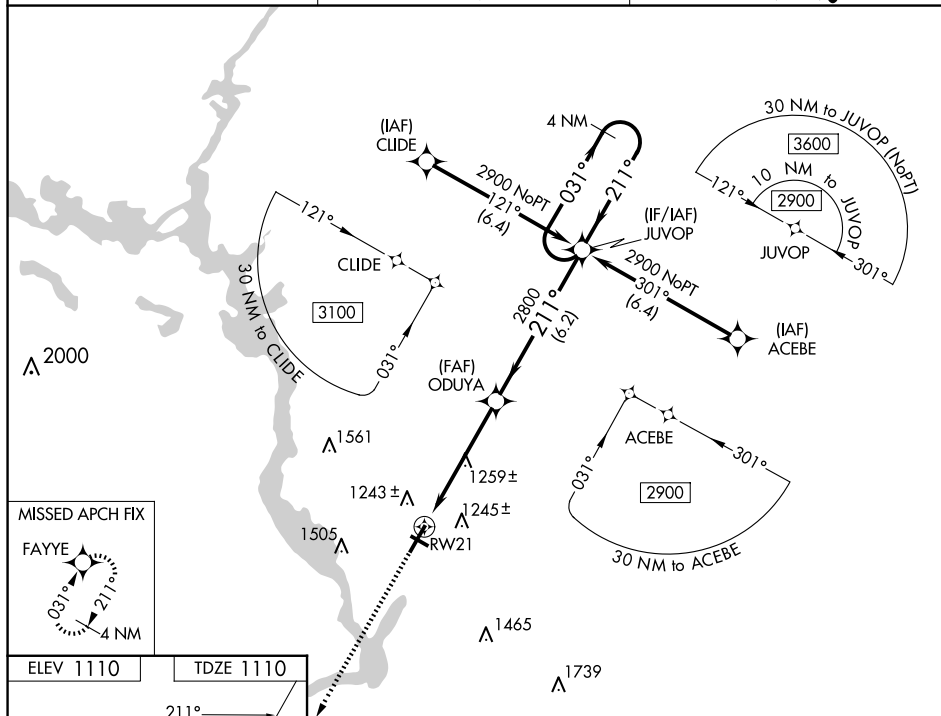

REIL Rwy 3 HIRL Rwy 3-21 and 12-30

1165

6038 X 120

3635 X 75

30

12

211°

2800

1.2 NM to RW21

4 NM

6.2 NM

4 NM

ODUYA 2800

JUVOP

031°

211°

2900

GP 3.00° TCH 44

CATEGORY	A	B	C	D
LPV DA	1360- ³ / ₄	250 (300- ³ / ₄)		
LNAV/VNAV DA	1457- ³ / ₄	347 (400- ³ / ₄)		
LNAV MDA	1520- ³ / ₄ 410 (500- ³ / ₄)	1520-1 410 (500-1)		
CIRCLING	1580-1 470 (500-1)	1600-1 490 (500-1)	1860-2 ¹ / ₄ 750 (800-2 ¹ / ₄)	1860-2 ¹ / ₂ 750 (800-2 ¹ / ₂)