

VORTAC INL	APP CRS	Rwy Idg	7400
114.95	134°	TDZE	1184
Chan 96(Y)		Apt Elev	1182

VOR RWY 13

FALLS INTL/EINARSON FLD (INL)

▼


▲

Circling to Rwy 4-22 NA at night. VDP NA when using Baudette altimeter setting. When local altimeter setting not received, use Baudette altimeter setting and increase all MDAs 140 feet, and S-13 Cats A/B visibility ¼ mile, Cats C/D visibility ½ mile. Increase Circling Cat B visibility ¼ mile, Cat C and D ½ mile. For inop MALSR when using Baudette altimeter setting, increase S-13 Cat A visibility ¼ mile.


MALSR

MISSED APPROACH: Climb to 2900 then right turn direct INL VORTAC and hold.

ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF) 1
---------------	-----------------------------------	--------------------------

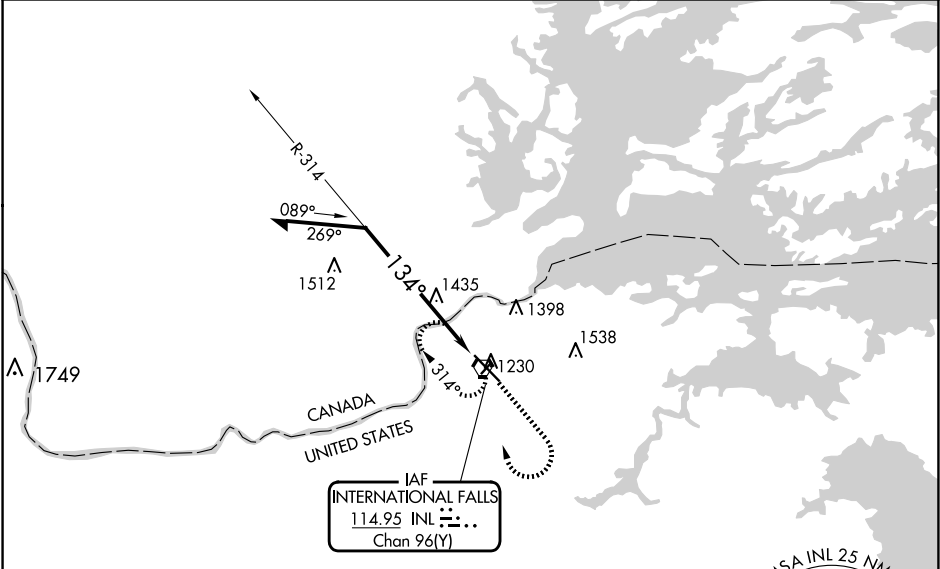

ELEV 1182	D	TDZE 1184
-----------	---	-----------

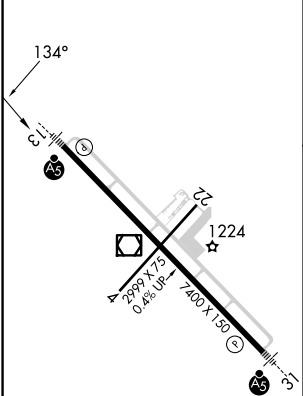

HIRL Rwy 13-31 1				
	Remain within 10 NM		INL VORTAC	2900
	2900		INL 2.5	INL
	314°		134°	
	2 NM			
CATEGORY	A	B	C	D
S-13	1880-½	696 (700-½)	1880-1½ 696 (700-1½)	1880-1¾ 696 (700-1¾)
CIRCLING	1880-1	698 (700-1)	1900-2 718 (800-2)	1900-2¼ 718 (800-2¼)

NC-1, 17 APR 2025 to 15 MAY 2025

NC-1, 17 APR 2025 to 15 MAY 2025