

LOC/DME I-GVT 110.5 Chan 42	APP CRS 176°	Rwy Idg 8030 TDZE 534 Apt Elev 535
---	------------------------	---

ILS Z or LOC Z RWY 17
MAJORS (GVT)

DME required.

A Inop table does not apply to S-ILS 17 all Cats and S-LOC 17 Cats A/B.
A For inop ALS, increase S-LOC 17 Cat E visibility to 1 $\frac{3}{8}$ SM. Autopilot coupled approach NA below 900 feet.


MALS



MISSED APPROACH: Climb to 1000 then climbing left turn to 2300 on heading 355° and BYP VORTAC R-145 to CIPEX/I-GVT 13.6 DME and hold.

AWOS-3 133.425	FORT WORTH CENTER 132.025 360.75	MAJORS TOWER ★ 118.65 (CTAF) 0 385.425	GND CON 121.7 335.8	UNICOM 122.95
-------------------	-------------------------------------	---	------------------------	------------------

Procedure NA for arrival on BYP VORTAC
airway radials 114 CW 173.

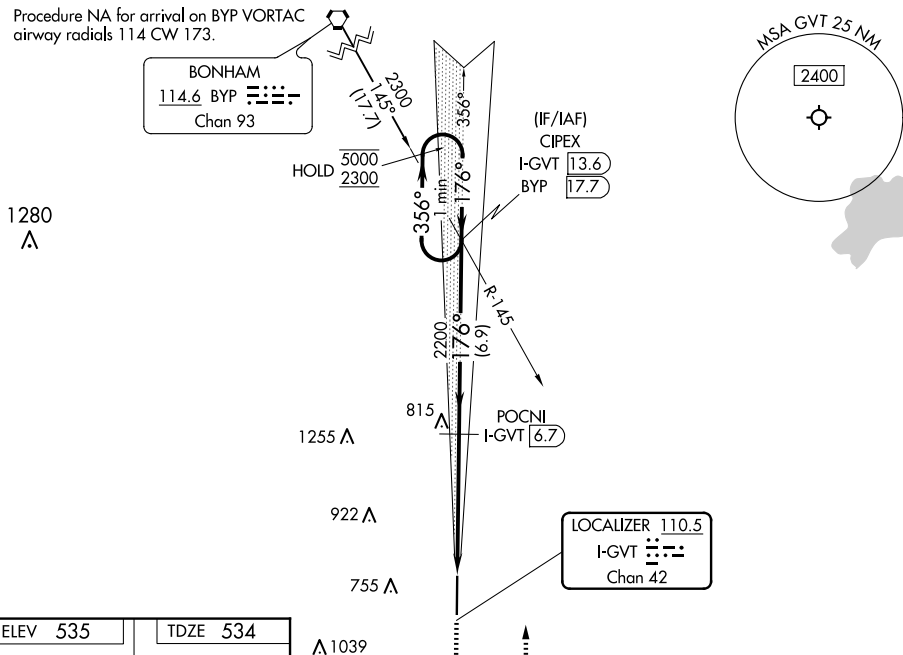

ELEV 535

TDZE 534

176°

41

0.4% UP

0.3% UP

8030 X 150

Restricted Use Apron

675

35

REIL Rwy 35

MRL Rwy 17-35

1000 ↑	2300 hdg 355°	BYP R-145	CIPEX I-GVT 13.6	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 74).				
CATEGORY	A	B	C	D	E			
S-ILS 17	734-1 200 (200-1)							
S-LOC 17	1000-1	466 (500-1)	1000-1½ 466 (500-1½)					
CIRCLING	1000-1 465 (500-1)	1060-1 525 (600-1)	1060-1½ 525 (600-1½)	1240-2¼ 705 (800-2¼)	1300-2¾ 765 (800-2¾)			