

WAAS CH 86205 W17A	APP CRS 176°	Rwy Idg 8030 TDZE 534 Apt Elev 535
--	------------------------	---

RNAV (GPS) RWY 17
MAJORS (GVT)




RNP APCH - GPS

T Inop table does not apply to LPV all Cats and LNAV Cats A and B.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat E visibility to 1½ SM.

MALS

MISSED APPROACH: Climb to 3000 direct VECUN and hold.

AWOS-3 133.425	FORT WORTH CENTER 132.025 360.75	MAJORS TOWER ★ 118.65 (CTAF) 0 385.425	GND CON 121.7 335.8	UNICOM 122.95
-------------------	-------------------------------------	---	------------------------	------------------

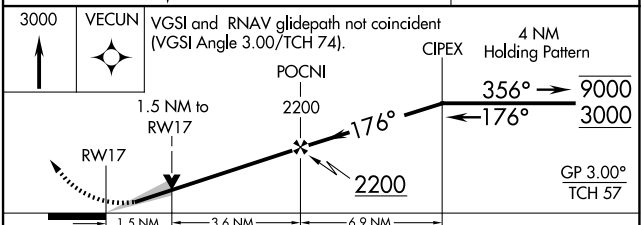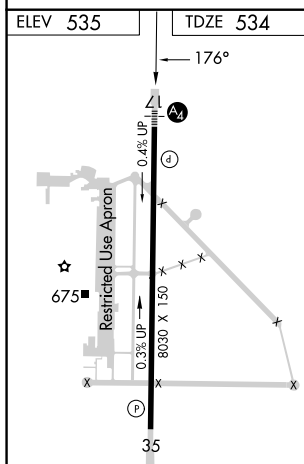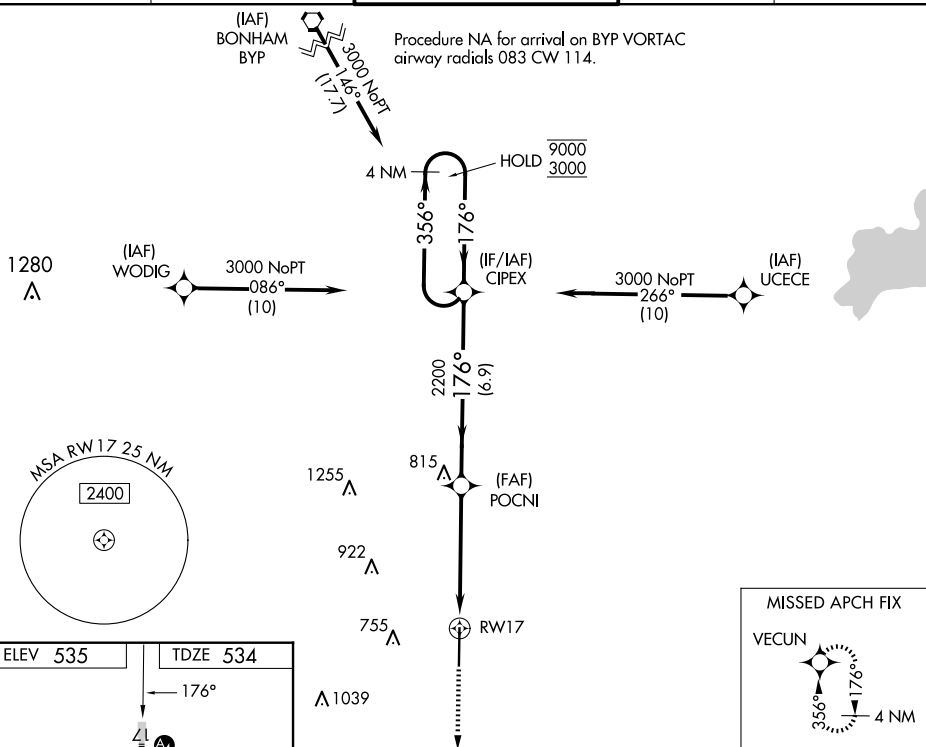

CATEGORY		A	B	C	D	E
LPV	DA	734-1 200 (200-1)				
LNAV/ VNAV	DA	943-1 409 (500-1)				
LNAV MDA		1060-1 526 (600-1)	1060-1¼ 526 (600-1¼)			
C CIRCLING		1060-1 525 (600-1)	1080-1 545 (600-1)	1080-1½ 545 (600-1½)	1240-2¼ 705 (800-2¼)	1300-2¾ 765 (800-2¾)